



# KENBRO

1<sup>st</sup> January 2022

## WE ARE YOUR SOLUTION

我们是你的最佳解决方案

WATERPROOFING, FLOORING AND CONSTRUCTION SOLUTIONS  
FOR ANY BUILDING PROJECTS

定制适用于任何建筑项目的防水、地板以及施工的解决方案。



Kenbro

Kenbro Waterproofing Products

Kenseal 1K .1

APP防水膜 APP - waterproofing membrane .2

Hyseal防水水泥 - Hyseal Waterproofing cement .3

Kenseal屋顶防水 - Kenseal Roof waterproofing .4

Hyseal 501 | Hyseal 501 Admix | Kenseal 550K .5

Hyseal 501 | Hyseal 501 Admix | Hyseal 505 .6

Kenseal 550K | Kenfix 3 .7

环氧防水地板 - Epoxy waterproof flooring .8

Kensealer .9

Kenbro Other Products

Kenbro

10. Kencoat wall coating - 肯考特墙面涂料

11. Kentop Hard - 硬质

12. Kenbro Paving blocks - 铺路砖

13. Skim coat - 脱脂涂料

14. Ceramic tile Adhesive - 瓷砖粘合剂



15. Kenbro Tile Grout - 瓷砖填缝剂

16. Kenbro PVC tiles 砖 与 and PVC Sheeting 薄膜



17. Kenbro Self-leveling cement - 自流平水泥

18. Kenbro Interlocking cement tiles - 连锁水泥瓦





PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Hyseal 501</b> A crystalline waterproofing compound, with active chemicals and additives to improve the water resistance of all RC structure.  一种结晶防水化合物，含有活性化学品和添加剂，以提高所有钢筋混凝土结构的耐水性。  <b>Packaging:</b> 包装： 20Kg公斤  <b>Coverage:</b> 覆盖范围： 0.75 kg per coat, brush applied. Total two coats application.  每层0.75 kg，刷涂。共涂两层。		<ol style="list-style-type: none"><li>1. This is a multipurpose compound used for both casting concrete and plaster works. 这是一种用于浇注混凝土和熟石灰工程的多用途复合材料。</li><li>2. Compatible with all sorts of concrete with admixtures or without. 与各种掺合料或不掺合料的混凝土相容。</li><li>3. Works best with concrete as it penetrates into the concrete to seal all the micro pores that allow water to penetrate through. 当涂料渗透到混凝土中以密封所有允许水渗透的微孔隙时，最好与混凝土一起使用。</li><li>4. Economical waterproofing solution to reduce extra costs after the casting has been done. 经济的防水解决方案，可以减少铸造后的额外成本。</li></ol>
	<b>Hyseal Admixture</b> 混合剂 A crystalline chemical waterproofing for reinforced concrete structures to be mixed with concrete.  一种晶体化学防水材料，用于与混凝土混合的钢筋混凝土结构。  <b>Packaging:</b> 包装： 1 Kg公斤  <b>Coverage:</b> 覆盖范围。 An average of 6 Kgs/cubic Meter OR 1Kg bag/50Kgs bag of Cement  平均每平方米6公斤或每50公斤一袋的水泥混合1公斤		<ol style="list-style-type: none"><li>1. Concrete water tanks 混凝土水箱</li><li>2. Foundation and building basements 地基和建筑地下室</li><li>3. Sewage and water treatment plants 下水道及污水处理厂</li><li>4. Swimming Pools &amp; Water Ponds 游泳池与水塘</li><li>5. Concrete Pipes 混凝土管</li><li>6. Waterproofs the entire depth of the Concrete Slab or wall. 混凝土板或墙面的整体防水深度</li></ol>
	<b>Hyseal Waterproof Cement</b> 防水水泥 A waterproofing compound, with active chemicals and additives to improve the water resistance of the structure. To be mixed with cement plaster  一种与水泥抹面混合的防水化合物，含有活性化学品和添加剂，以提高结构的耐水性。  <b>Packaging:</b> 包装： 1 Kg公斤  <b>Coverage:</b> 覆盖范围： 1 Kg Bag to be added with 50Kg of Cement  每袋一公斤混合50公斤水泥 1. Economical waterproofing solution to		<p>reduce water absorption. 经济的防水解决方案，减少吸水率。</p> <ol style="list-style-type: none"><li>2. Compatible with all sorts of concrete &amp; plaster enders 适用于各种混凝土和石膏浇注料</li><li>3. Works best with concrete structures 混凝土结构的最佳工程</li></ol>
	<b>Hyseal 505</b> A patching and plugging compound for water leakages. It is a blend of active chemicals to stop water leakages from any concrete structure  一种防水堵漏剂。它是一种活性化学物质的混合物，可以阻止混凝土结构漏水。  <b>Packaging:</b> 包装： 1 Kg公斤 5 Kg公斤  <b>Coverage:</b> 覆盖范围： As per the size of the leakage, depending on the user.  根据泄漏程度，由用户决定。		<ol style="list-style-type: none"><li>1. Hyseal 505 is an instant water plugging compound to stop water leakages instantly Hyseal 505是一种即时堵水化合物，可立即阻止水泄漏。</li><li>2. Can plug and patch any concrete surface that is leaking 可以封堵和修补任何泄漏的混凝土表面</li><li>3. Does not need any complicated tools or equipment easy to use. Just add water to form a dough and apply as a plug. 易于使用不需要任何复杂的工具，只需加水调和，塞在渗漏处即可。</li></ol>

\* Prices indicated are subject to change, please confirm before ordering. Prices indicated are inclusive of vat

PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Kenseal primer &amp; sealer</b> 底层涂料和密封剂 Priming, Curing, Sealing & Protecting Coating for concrete surfaces.  混凝土表面的底层涂料、养护、密封和保护涂层。  <b>Packaging:</b> 包装： 5 litres升 20 litres升  <b>Coverage:</b> 覆盖范围： This will depend on the nature of the concrete surface. For smooth surface 1 liter of primer will cover between 5-7 square meter  这取决于混凝土表面的性质。对于光滑表面，1升底层涂料可覆盖在 5-7平方米		<ol style="list-style-type: none"><li>1. Used as a primer before application of Kenseal waterproofer 在使用Kenseal防水剂之前用作底层涂料</li><li>2. Can be applied on fresh concrete as a curing agent 可作为养护剂用于新拌混凝土上</li><li>3. Can be applied as a seal coat on stones, Mazeras slabs &amp; cement tiles 可在石头、马泽拉斯板 and 水泥砖上用作密封层。</li></ol>
	<b>Kenseal</b> A liquid applied waterproof coating. A Seamless, Jointless, and continuous Flexible Coating.  一种液体防水涂料。  无缝隙、无接缝并且持续的柔性涂层。  <b>Packaging:</b> 包装： 20Kg公斤 Bucket 桶  <b>Coverage:</b> 覆盖范围： Approximately 1/2 KG per Sqm per coat. Required a four coat application.  每层每平方米约1/2千克。需要涂四层。 1. Kenseal applied on flat roofs, gutters, balconies and terraces.		<p>Kenseal 适用于平屋顶、排水沟、阳台和露台。</p> <ol style="list-style-type: none"><li>2. If subsequently covered by other finishes, it will have a longer life span. 如有其他覆盖面，寿命可以更长</li><li>3. Very good UV resistance. 非常好的抗紫外线能力</li><li>4. Can be applied on any shape. 可应用于任何轮廓形状</li><li>5. White colour reflects the heat. 白色反射热量。</li><li>6. Can be made in any colour, as per the customers requirement. 可根据客户要求制作任何颜色。</li></ol>
	<b>Kenbro Kenseal 1K</b> A cementitious chemical waterproofing for Stone Walls & Brick Works. To be applied on the positive side.  应用于石墙与砖砌墙正面的水泥化学防水。 <b>Packaging:</b> 包装 18 Kg 公斤  <b>Coverage:</b> 覆盖范围： Approximately 1 to 1.5 Kgs per Sq.mt per coat depending on the surface to be applied on. Two coats application.  须两层涂层，每层大约1到1.5千克/平方米，这也取决于要涂抹的表面。		<ol style="list-style-type: none"><li>1. Stone walls 石墙</li><li>2. Concrete 混凝土</li><li>3. Brick work 砖砌体</li><li>4. light Weight Therma Blocks 轻质塞尔玛砖</li><li>5. Ideal for water tanks &amp; ponds 适用于水箱和池塘</li><li>6. Safe for potable water 饮用水安全</li></ol>
	<b>Kenbro kenseal 550K</b> An Acrylic Cement Based Waterproof Slurry Coat.  丙烯酸水泥基防水泥浆涂层。  <b>Packaging:</b> 包装： Part A Liquid - 7Litres Part B Powder - 21Kg  A部分液体 - 7升 B部分粉末 - 21公斤  <b>Coverage:</b> 覆盖范围： Approximately 1 to 1.5 Kgs per Sq.mt per coat depending on the surface to be applied on. 2 coats application.  两层涂层。每层大约1至1.5千克/米，取决于要涂抹的表面。		<ol style="list-style-type: none"><li>1. Swimming pools 游泳池</li><li>2. Ponds 筑成池塘</li><li>3. Gutters 水槽</li><li>4. Drainage systems 排水系统</li><li>5. Safe for potable water. 饮用水安全</li></ol> <p>Two coat Application is jointless and looks sleek, used where there is stagnant water.  双涂层无缝隙，表面光滑，适用于有积水的地方。</p>

\* 所示價格可能有變動，請在訂購前確認。所示價格包括增值稅











PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>KenFix3</b> Liquid copolymer latex 液体共聚乳胶		<p>As bonding agent apply as a tack coat on the old surface to receive new floor or wall finish. As waterproofing agent mix 5 litres per bag of cement in the plaster mix. For High abrasion in the floor, add 5-10litres per bag of cement in the screed. A 3 fold advantage in this compound.</p> <p>作为粘接剂，在旧表面上涂一层粘接剂，以获得新的地板或墙面饰面。作为防水剂，在石膏混合物中每袋水泥混合5升。对于地板的高磨损，每袋水泥在熨平板中添加5至10升。这种化合物有三重功效的优势。</p> <p><b>1. Bonding agent</b> 粘接剂</p> <p><b>2. Waterproofing agent</b> 防水剂</p> <p><b>3. High abrasion &amp; compressive strength.</b> 高抗磨损与高抗压</p>
	<b>Packaging:</b> 包装: 5 litre 升 20 litres 升 200 litres 升		
	<b>Kenomix P1</b>		<p>Used as an Admixture in concrete for water reduction in the mix there by, maintains water cement ratio and achieve high concrete strength.</p> <p>用作混凝土中的混合料，用于混凝土配合比的减水，保持水灰比，达到较高的混凝土强度。</p> <p>Used as a pumping aid as well. When mixing the concrete, add half the required water, then add the required dose of Kenomix P1.</p> <p>也用作辅助泵。搅拌混凝土时，加入所需水量的一半，然后加入所需剂量的 Kenomix P1。</p> <p>Thereafter, add little water for the required flowability in the concrete mix.</p> <p>此后，在混凝土混合料中添加少量水以达到所需的流动性。</p>
	<b>Packaging:</b> 包装: 5 litres 升 20 litres 升 200 litres 升		
	<b>Bitumen Primer BF 4</b> 沥青底层涂层BF 4		<p>Applied as a primer on roof Screed before application of APP waterproofing membrane can be applied as a protective paint to metal.</p> <p>用作屋顶底层涂层 应用于APP前的熨平板 防水膜 可作为保护材料使用 金属油漆。</p>
	<b>Solvent based bitumen primer</b> 溶剂型沥青底层涂层		
	<b>Bituminous Aluminum Paint</b> 沥青铝漆		<p>To be applied on all Bitumenous roof waterproofing systems,</p> <p>适用于所有沥青 屋顶防水系统， Eg. On APP, Colas or Asphalt waterproofing.</p> <p>例如：APP、克拉斯或沥青防水。</p>
	<b>High grade roofing alluminium paint for sealing all bituminous roof finishes.</b> 高档屋面铝漆 用于密封所有沥青屋顶饰面。		
	<b>Self Levelling Compound</b> 自流平化合物		<p>1. Leveling rough concrete floors by a cement topping. 用于水泥面层平整的粗混凝土地面</p> <p>2. Finds it's on level 表面呈水平面</p> <p>3. A very smooth surface is created 表面非常光滑</p> <p>4. After application can be covered by subsequent floor finishes like ceramic tiles, PVC vinyl flooring, laminates and wooden floor. 使用后可覆盖后续地板饰面，如瓷砖、PVC乙烯地板、层压板和木地板。</p>
	<b>Packaging:</b> 包装: 4 litres 升 20 litres 升		
	<b>Ceramic Tile Adhesive Powder</b> 瓷砖胶粉		<p>Applied on: 应用于: 1. plastered surface 抹灰面</p> <p>2. concrete floors 混凝土楼板</p>
	<b>A wall and floor adhesive for ceramic tiles.</b> 一种用于瓷砖墙和从瓷砖地板的粘合剂		
	<b>Premium grade Adhesive Powder</b> 优质粘合剂粉末		<p>1. Plastered surface 抹灰面</p> <p>2. Concrete Floors 混凝土楼板</p>
	<b>A wall and floor adhesive for porcelain and granito tiles.</b> 用于瓷器和granito瓷砖的墙壁和地板粘合剂。		
	<b>Tile Grout</b> 瓷砖填缝剂 Ceramic Wall & Floor tiles joint Filler 陶瓷墙与陶瓷地砖的填缝料		<p>1. High water resistance 耐水性高</p> <p>2. 2mm to 8mm Joint width 2 mm至8 mm接缝宽度</p> <p>3. Internal &amp; External use 内部和外部使用</p> <p>4. Easy to apply &amp; clean 易于使用和清洁</p> <p>5. Mould resistant 防霉</p> <p>6. Can be used on Ceramic, Porcelain &amp; Granito tiles joints. 可用于陶瓷、铺地砖和花岗岩瓷砖的接缝。</p>
	<b>Packaging:</b> 包装: 1 Kg Bag 公斤袋 3 Kg Bag 公斤袋		
	<b>Self Levelling Cement Compound</b> 自流平水泥混合物		<p>1. Leveling rough concrete floors by a cement topping. 用于水泥面层平整的粗混凝土地面</p> <p>2. Finds it's on level 表面呈水平面</p> <p>3. A very smooth surface is created 表面非常光滑</p> <p>4. After application can be covered by subsequent floor finishes like ceramic tiles, PVC vinyl flooring, laminates and wooden floor. 使用后可覆盖后续地板饰面，如瓷砖、PVC乙烯地板、层压板和木地板。</p>
	<b>Packaging:</b> 包装: 25 Kg Bag 公斤袋		

\* Prices indicated are subject to change, please confirm before ordering. Prices indicated are inclusive of vat









PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Ceramic Tile Adhesive Powder</b> 瓷砖胶粉		<p>Applied on: 应用于: 1. plastered surface 抹灰面</p> <p>2. concrete floors 混凝土楼板</p>
	<b>A wall and floor adhesive for ceramic tiles.</b> 一种用于瓷砖墙和从瓷砖地板的粘合剂		
	<b>Premium grade Adhesive Powder</b> 优质粘合剂粉末		<p>1. Plastered surface 抹灰面</p> <p>2. Concrete Floors 混凝土楼板</p>
	<b>A wall and floor adhesive for porcelain and granito tiles.</b> 用于瓷器和granito瓷砖的墙壁和地板粘合剂。		
	<b>Tile Grout</b> 瓷砖填缝剂 Ceramic Wall & Floor tiles joint Filler 陶瓷墙与陶瓷地砖的填缝料		<p>1. High water resistance 耐水性高</p> <p>2. 2mm to 8mm Joint width 2 mm至8 mm接缝宽度</p> <p>3. Internal &amp; External use 内部和外部使用</p> <p>4. Easy to apply &amp; clean 易于使用和清洁</p> <p>5. Mould resistant 防霉</p> <p>6. Can be used on Ceramic, Porcelain &amp; Granito tiles joints. 可用于陶瓷、铺地砖和花岗岩瓷砖的接缝。</p>
	<b>Packaging:</b> 包装: 1 Kg Bag 公斤袋 3 Kg Bag 公斤袋		
	<b>Self Levelling Cement Compound</b> 自流平水泥混合物		<p>1. Leveling rough concrete floors by a cement topping. 用于水泥面层平整的粗混凝土地面</p> <p>2. Finds it's on level 表面呈水平面</p> <p>3. A very smooth surface is created 表面非常光滑</p> <p>4. After application can be covered by subsequent floor finishes like ceramic tiles, PVC vinyl flooring, laminates and wooden floor. 使用后可覆盖后续地板饰面，如瓷砖、PVC乙烯地板、层压板和木地板。</p>
	<b>Packaging:</b> 包装: 25 Kg Bag 公斤袋		

\* 所示價格可能會有變動，請在訂購前確認。所示價格包括增值稅










PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Skim Coat</b> 脱脂涂层 <b>Smoothering wall Finish</b> 平滑墙面饰面  <b>Packaging:</b> 包裝: <b>25 Kg Bag</b> 公斤袋  <b>Coverage:</b> 覆盖范围: <b>Approximately 1.3 Sq.m per Kg depending on the thickness to be applied.</b>  每公斤约1.3平方米取决于应用厚度。		<ol style="list-style-type: none"><li><b>1. Smooth textured substrates</b> 平滑纹理基板</li><li><b>2. Adhere on plastered Surfaces</b> 粘贴在抹灰表面上</li><li><b>3. Can be painted on after 24 hours</b> 24小时后可上漆</li><li><b>4. Filler &amp; joint compound</b> 填料和填缝料</li><li><b>5. Up to 5mm coat</b> 最多5毫米厚涂层</li><li><b>6. Can be coloured</b> 可以着色</li></ol>
	<b>Kentop Hard</b> 硬质 <b>Kentop</b> <b>Concrete Floor hardener</b> 混凝土地面硬化剂  <b>Packaging:</b> 包裝: <b>25 Kg Bag</b> 公斤袋  <b>Coverage:</b> 覆盖范围 <b>Medium duty wear 6kg/sq.meter</b> <b>Heavy duty wear 8kg/sq.meter</b>  中型磨损6公斤/平方米重型磨损8公斤/平方米		<ol style="list-style-type: none"><li><b>1. Applied as a dry shake over fresh concrete.</b> 作为新拌混凝土的干摇法。</li><li><b>2. Hard wearing surface for heavy traffic.</b> 交通拥挤时的耐磨表面。</li><li><b>3. Can be applied indoor and outdoor.</b> 可室内外使用。</li><li><b>4. If power floated gives a perfect leveled and smooth concrete</b> 如果用电动抹子抹平，则混凝土应平整光滑。</li></ol>
	<b>Polyflex Wood Glue: Polyflex木胶:</b> <b>A PVA Based tile adhesive highly recommended for sticking wood to wood</b> 强烈推荐使用P/A基瓷砖粘合剂作为木材间的粘合剂。  <b>Packaging:</b> 包裝: <b>4 Kg</b> 公斤 <b>20 Kg</b> 公斤  <b>Coverage:</b> 覆盖范围 <b>Approximately 1/2 Sq. M per Kg depending on the surface it is applied on.</b>  每公斤大约1/2平方米，取决于所施涂的表面。		<b>Polyflex Wood glue is a thick creamy based compound specially designed to bond wood,</b>  Polyflex木胶是一种专门用于粘合木材的厚膏状化合物。
	<b>Polyflex Pvc Tile Adhesive</b> 聚氯乙烯瓷砖胶粘剂 <b>An acrylic based tile adhesive used for PVC Tiles and Vinyl sheeting.</b> 一种丙烯酸基瓷砖粘合剂，用于PVC瓷砖和乙烯薄膜。  <b>Packaging:</b> 包裝: <b>4 Kg</b> 公斤 <b>20 Kg</b> 公斤  <b>Coverage:</b> 覆盖范围 <b>Approximately 3.5 Sq. M per Kg depending on the surface it is applied on.</b>  每公斤大约3.5平方米，取决于所施涂的表面。		<b>Creamy acrylic based compound specifically designed to bond flexible tiles to concrete and wooden surfaces. It may also be used for bonding wooden, parquets to floors, expanded polysterene ceilings and walls. Fibreglass insulations to walls</b>  乳状丙烯酸基化合物 专门设计用于粘合混凝土柔性瓷砖 木质表面。  它也可用于将木材、镶板粘合到地板、发泡聚苯乙烯天花板和墙壁上以及玻璃纤维隔热墙

\* Prices indicated are subject to change, please confirm before ordering. Prices indicated are inclusive of vat

PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Polyflex GF86 Tile Adhesive:</b> <b>Polyflex GF86瓷砖胶粘剂:</b>  <b>A PVA based tile adhesive used for PVC Tiles</b> 一种基于聚乙烯醇的瓷砖胶粘剂，用于聚氯乙烯瓦  <b>Packaging:</b> 包裝: <b>4 Kg</b> 公斤 <b>20 Kg</b> 公斤  <b>Coverage:</b> 覆盖范围 <b>Approximately 3.5 Sq. M per Kg depending on the surface it is applied on.</b> 每公斤大约3.5平方米，取决于所施涂的表面。		<b>White PVA based compound specifically designed to bond Rigid tiles manufactures to concrete and wooden surfaces.</b>  白色聚醋酸乙烯基化合物，专门设计用于将刚性瓷砖制造与混凝土和木质表面粘合。
	<b>Polyflex Parquet Adhesive:</b> <b>Polyflex镶木地板粘合剂:</b>  <b>A PVA based parquet adhesive</b>  <b>Packaging:</b> 包裝: <b>4 Kg</b> 公斤 <b>20 Kg</b> 公斤  <b>Coverage:</b> 覆盖范围 <b>Approximately 3.5 Sq. M per Kg depending on the surface it is applied on.</b> 每公斤大约3.5平方米，取决于所施涂的表面。		<b>Polyflex parquet adhesive is a thick creamy based compound specially designed to bond parquet to concrete and wooden surfaces. It may also be used for bonding of tiles to floors.</b>  Polyflex镶木地板粘合剂是一种厚乳状化合物，专门设计用于将镶木地板粘合到混凝土和木质表面上。也可用于瓷砖与地板的粘合。
	<b>Polyflex PVC Tile Adhesive:</b> 聚氯乙烯瓷砖胶粘剂:  <b>A Bituminious based Tile Adhesive</b> 一种沥青基瓷砖胶粘剂  <b>Packaging:</b> 包裝: <b>4 Kg</b> 公斤 <b>20 Kg</b> 公斤  <b>Coverage:</b> 覆盖范围 <b>Approximately 3.5 Sq. M per Kg depending on the surface it is applied on.</b> 每公斤大约3.5平方米，取决于所施涂的表面。		<b>Polyflex Bitumen based tile adhesive is a thick Black based compound specially designed to bond floor tiles to concrete surfaces. it can also be used to stick parquet/wood blocks to concrete floors.</b>  Polyflex沥青基瓷砖胶粘剂 是一种黑色的厚基化合物，专门设计用于地砖与混凝土表面的粘合。也可用于将镶木地板/木块粘贴到混凝土地板上。
	<b>Polyflex Ceramic Tile Adhesive:</b> <b>Polyflex瓷砖粘合剂:</b>  <b>An PVA Based tile adhesive highly recommended for ceramic tiles</b> 一种高性能的聚乙烯醇基瓷砖胶粘剂 推荐用于瓷砖  <b>Packaging:</b> 包裝: <b>4 Kg</b> 公斤 <b>20 Kg</b> 公斤  <b>Coverage:</b> 覆盖范围 <b>Approximately 1/2 Sq. M per Kg depending on the surface it is applied on.</b> 每公斤约1/2平方米 取决于应用表面		<b>Polyflex Ceramic tile adhesive is a thick creamy based compound specially designed to bond Ceramic tiles to concrete surfaces</b>  Polyflex瓷砖粘合剂是一种厚的乳状化合物，专门设计用于将瓷砖粘合到混凝土表面。

\* 所示價格可能有變動，請在訂購前確認。所示價格包括增值稅



PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Polyflex Rooftex Caulking Compound:</b> Polyflex屋顶填縫料: A Multi-purpose bitumen roof sealer 一种多用途沥青屋顶密封材料  <b>Packaging:</b> 包装: 4 Kg 公斤 20 Kg 公斤		<b>This Sealant can be used for sealing cracks, holes and joints. Also for repairing of drains, downpipes, flashings, skylights, ventilators, parapet walls, asbestos cement sheets, iron sheets and will stick to most surfaces.</b>  这种密封胶可用于密封裂缝、孔隙和接头。此外，对于排水管、落水管、遮雨板、天窗、通风机、防护矮墙、石棉水泥板、铁板的维修，大多数表面也会用到。
	<b>Polyflex Strong bond Contact Adhesive:</b> Polyflex 强力粘合接触胶  <b>Packaging:</b> 包装: 5 Kg 公斤 20 Kg 公斤  <b>Coverage:</b> 覆盖范围 Approximately 1/2 Sq. M per Kg 公斤 depending on the surface it is applied on. 每公斤约1/2平方米 取决于应用表面		<b>Polyflex multipurpose Strong Adhesive, is a thick creamy rubberised high quality adhesive designed to bond wood, formica, plastic linoleum, and PVC floor tiles. It can also be used to repair leather products and upholstery.</b>  Polyflex多用途强力胶，是一种厚乳状胶。优质橡胶胶粘剂 设计用于粘合木材、胶木、塑料油毡和PVC地板。也可以用来修理瓷砖、皮革制品和室内装潢。
	<b>Kenbro Polysynthetic Manhole Cover:</b> Kenbro 聚合成材料检修孔盖  <b>Used for Sewage Drains, Electric ducts and water tank Covers</b> 用于污水排放、电气管道和水箱盖  <b>Capacity &amp; Size:</b> 尺寸： 容量和尺寸: A 15 - 1.5 Tonne 吨- 600x450 (18" x 24") 1.5 Tonne 吨- 450x450 (18" x 18") 1.5 Tonne 吨- 300x300 (12" x 12")  <b>For off the road instalation.</b> 用于路面安装。  <b>Polysynthetic or fiber Reinforced manholes</b>		<b>is a combination of really high quality material.</b> 聚合成材料或纤维增强的检修孔是真正高品质材料的组合。  <b>1. Weatherproof, waterproof and non-corrosive.</b> 防风雨、防水、无腐蚀。 <b>2. Buglar proof, no re-sale value</b> 防盗，无转售价值 <b>3. High strength to weight ratio</b> 高强度重量比 <b>4. Light weight - ease of handling, low transport cost.</b> 重量轻-操作方便，运输成本低。
	<b>Kenbro Polysynthetic Manhole Cover:</b> Kenbro 聚合成材料检修孔盖 <b>Used for Sewage Drains, Electric ducts and water tank Covers</b> 电动排水管 管道和水箱盖  <b>Sizes:</b> 450 x 600mm 毫米 - (18"x 24") 450 x 900mm 毫米 - (18" x 36")  <b>Capacity:</b> 容量: A 50 - 5 Tonne <b>For private driveways - Light vehicles.</b> 私人车道-轻型车辆。		<b>Polysynthetic or fiber Reinforced manholes is a combination of really high quality material.</b> 聚合成材料或纤维增强的检修孔是真正高品质材料的组合。  <b>1. Weatherproof, waterproof and non-corrosive.</b> 防风雨、防水、无腐蚀。 <b>2. Buglar proof, no re-sale value</b> 防盗，无转售价值 <b>3. High strength to weight ratio</b> 高强度重量比 <b>4. Light weight - ease of handling, low transport cost.</b> 重量轻-操作方便，运输成本低。

\* Prices indicated are subject to change, please confirm before ordering. Prices indicated are inclusive of vat

PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Kenbro Polysynthetic Manhole Cover:</b> Kenbro 聚合成材料检修孔盖: <b>Used for Sewage Drains, Electric ducts and water tank Covers</b> 电动排水管 管道和水箱盖  <b>Sizes:</b> 容量: 600 x 600 mm 毫米 (24"x 24")  <b>Capacity:</b> 容量: 1.5 Tonne 吨		<b>Polysynthetic or fiber Reinforced manholes is a combination of really high quality material.</b> 聚合成材料或纤维增强的检修孔是真正高品质材料的组合。 <b>1. Weatherproof, waterproof and non-corrosive.</b> 防风雨、防水、无腐蚀。 <b>2. Buglar proof, no re-sale value</b> 防盗，无转售价值 <b>3. High strength to weight ratio</b> 高强度重量比 <b>4. Light weight - ease of handling, low transport cost.</b> 重量轻-操作方便，运输成本低。
	<b>Kenbro Polysynthetic Manhole Cover:</b> Kenbro 聚合成材料检修孔盖 <b>Used for Storm water Drains, Electric ducts and water tank Covers.</b> 用于雨水排放，电动管道和水箱盖。  <b>Sizes:</b> 尺寸: Ø 530mm 毫米  <b>Capacity:</b> 容量: 5 Tonne 吨		<b>Polysynthetic or fiber Reinforced manholes is a combination of really high quality material.</b> 聚合成材料或纤维增强的检修孔是真正高品质材料的组合。  <b>1. Weatherproof, waterproof and non-corrosive.</b> 防风雨、防水、无腐蚀。 <b>2. Buglar proof, no re-sale value</b> 防盗，无转售价值 <b>3. High strength to weight ratio</b> 高强度重量比 <b>4. Light weight - ease of handling, low transport cost.</b> 重量轻-操作方便，运输成本低。
	<b>Kenbro Polysynthetic Manhole Cover</b> Kenbro 聚合成材料检修孔盖 <b>Used for storm water Drains, Electric ducts and water tank Covers</b> 用于雨水排放，电动管道和水箱盖  <b>Capacity &amp; Sizes:</b> 容量和尺寸: Ø 530 mm 毫米 - 20 Tonnes 吨 Ø 250 mm 毫米 - 1.5 Tonnes 吨		<b>Polysynthetic or fiber Reinforced manholes is a combination of really high quality material.</b> 聚合成材料或纤维增强的检修孔是真正高品质材料的组合。  <b>1. Weatherproof, waterproof and non-corrosive.</b> 防风雨、防水、无腐蚀。 <b>2. Buglar proof, no re-sale value</b> 防盗，无转售价值 <b>3. High strength to weight ratio</b> 高强度重量比 <b>4. Light weight - ease of handling, low transport cost.</b> 重量轻-操作方便，运输成本低。
	<b>Kenbro Polysynthetic Manhole Cover:</b> Kenbro 聚合成材料检修孔盖 <b>Used for Sewage Drains, Electric ducts and water tank Covers</b> 电动排水管道和水箱盖  <b>Sizes:</b> 尺寸: Triangle 600 mm 毫米  <b>Capacity:</b> 容量: 20 Tonne 吨		<b>Polysynthetic or fiber Reinforced manholes is a combination of really high quality material.</b> 聚合成材料或纤维增强的检修孔是真正高品质材料的组合。  <b>1. Weatherproof, waterproof and non-corrosive.</b> 防风雨、防水、无腐蚀。 <b>2. Buglar proof, no re-sale value</b> 防盗，无转售价值 <b>3. High strength to weight ratio</b> 高强度重量比 <b>4. Light weight - ease of handling, low transport cost.</b> 重量轻-操作方便，运输成本低。

\* 所示價格可能有變動，請在訂購前確認。所示價格包括增值稅



PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Kenbro Polysynthetic Drainage Cover:</b> <b>Kenbro</b> 多合成排水盖 <b>Used for Sewage Drains, Electric ducts and water tank Covers</b> 用于污水排放、电气管道和水箱盖 <b>Sizes:</b> 尺寸: <b>350 x 500 mm 毫米- (14"x 20")</b> <b>Capacity:</b> 容量: <b>1.5 Tonne 吨</b>		<b>A heavy Duty Polysynthetic or fiber Reinforced drain covers is a combination of really high quality material.</b> 重型聚合成纤维或纤维增强的排水井盖是真正高品质材料的组合。  <b>1. Weatherproof, waterproof and non-corrosive.</b> 防风雨、防水、无腐蚀。 <b>2. Buglar proof, no re-sale value</b> 防盗，无转售价值 <b>3. High strength to weight ratio</b> 高强度重量比 <b>4. Light weight - ease of handling, low transport cost.</b> 重量轻-操作方便，运输成本低。
	<b>Kenbro Polysynthetic Drainage Cover:</b> <b>Kenbro</b> 多合成排水盖: <b>Used for Storm water Drains, Electric ducts and water drainage channels.</b> 用于雨水排放、电气管道和排水沟。 <b>Sizes:</b> 尺寸: <b>500 x 550mm 毫米- (14"x 22")</b> <b>250 x 550mm 毫米- (10"x 22")</b> <b>Water drainage Grating 排水格栅</b> <b>Capacity:</b> 容量: <b>1.5 Tonne 吨</b>		<b>A light duty Polysynthetic or fiber Reinforced drain cover is a combination of really high quality material.</b> 一个轻负荷的聚合成或纤维增强的排水盖是一个真正的高品质材料的组合  <b>1. Weatherproof , waterproof and non-corrosive.</b> 防风雨、防水、无腐蚀。 <b>2. Buglar proof, no re-sale value</b> 防盗，无转售价值 <b>3. High strength to weight ratio</b> 高强度重量比 <b>4. Light weight - ease of handling low transport cost.</b> 重量轻-易于搬运，运输成本低。
	<b>Earth Pit:</b> 土坑: <b>Fibre glass chamber for protecting electric earth rods.</b> 保护接地棒的玻璃纤维室。 <b>Size:</b> 尺寸: <b>300mm 毫米 x 300mm 毫米 x 300mm 毫米</b>  <b>Cannot be used in heavy traffic areas, especially where cars may pass.</b> 不能在交通拥挤的地区使用，尤其是汽车可能经过的地方。		<b>1. Offers a high level of protection for critical grounding terminations</b> 为关键接地终端提供高水平的保护 <b>2. Ease of maintenance of the ground termination</b> 地面终端维护方便 <b>3. Easy to identify with embossed lid detail.</b> 易于识别与有压花盖细节
	<b>Kenpoxy Primer;</b> <b>Kenpoxy</b> 底层涂料:  <b>An Epoxy primer applied to concrete surface to receive subsequent epoxy overlays.</b> 一种环氧底层涂料，用于混凝土表面，以获得随后的环氧涂层。 <b>Packaging:</b> 包装: <b>PART 部 A 12.40 Kg 公斤</b> <b>or 或 PART 部分 B 11 litres 升</b>  <b>Mix well before use. 使用前充分混合。</b> <b>Apply with a roller, paint brush after cleaning the surface thoroughly.</b> 彻底清洁表面后，用滚筒、油漆刷涂抹。		<b>1. A primer for bonding Epoxy overlays</b> 用于粘合环氧涂层的底层涂料 <b>2. Can be applied as a dust proofer coating on floor screeds</b> 可作为地坪砂浆的防尘涂料使用。 <b>3. Can be applied on hairline cracks to seal off the surface</b> 可用于细裂缝，以密封表面

\* Prices indicated are subject to change, please confirm before ordering. Prices indicated are inclusive of vat



PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Kenpoxy 230</b> <b>An Epoxy self-smoothing overlay for floors where a very smooth &amp; hardwearing surface is required.</b> 一种环氧树脂自平滑覆盖层，用于需要非常光滑和耐磨表面的地板。 <b>Packaging:</b> 包装: <b>4 PART Component    37.8 Kg 公斤</b> <b>or 要么                    21 litres 升</b>  <b>Applied in thickness of 2mm to 4mm</b> 厚度为2毫米至4毫米  <b>An Epoxy overlay system for:</b> 环氧树脂覆盖系统:		<b>1. Food factories</b> 食品厂 <b>2. Pharmaceutical industries</b> 制药行业 <b>3. Milk Dairies</b> 牛奶场 <b>4. Laboratories</b> 实验室 <b>5. Printing press</b> 印刷机 <b>6. Garage floors</b> 车库地板 <b>7. Coffee/tea factories</b> 咖啡/茶厂 <b>8. Horticultural pack houses</b> 园艺包装屋
	<b>Kenpoxy 240</b> <b>An Epoxy screed for a hard wearing floor.</b> 用于耐磨地板的环氧砂浆层。 <b>Packaging:</b> 包装: <b>4 PART Component    31.4 Kg 公斤</b> <b>or 要么                    14.5 litres升</b>  <b>Applied in thickness of 3mm to 12mm, depending on the floor usage.</b> 厚度为3毫米至12毫米，视地板使用情况而定。		<b>An Epoxy floor screed for a very hard wearing surface</b> 用于非常坚硬的磨损表面的环氧地坪  <b>1. Heavy Industrial floors</b> 重工业楼层 <b>2. Engineering workshops</b> 工程车间 <b>3. Forklift areas</b> 叉车区 <b>4. Non-slip wet areas</b> 防滑湿区
	<b>Light weight Thermablock</b> 轻质保温砖 <b>Used for building and masonry work</b> 轻质保温砖 <b>Sizes:</b> 尺寸: <b>500 x 200x x200mm 毫米    Weight of 重量重 13 Kg</b> <b>Solid Block 实心块</b> <b>Coverage:</b> 覆盖范围 <b>10 pcs per square metre 每平方米10件</b> <b>50 pcs per cubic metre 每立方米50个</b>  <b>The application of therma blocks in external walls and internal dividing walls.</b> 应用于外墙和内隔墙保温砖		<b>1. Extremely light weight compared to concrete blocks, stones or bricks.</b> 与混凝土块、石块或砖块相比，重量非常轻。 <b>2. High thermal &amp; sound insulation.</b> 高隔热隔音。 <b>3. High fire resistance</b> 耐火性高 <b>4. Cheaper transport cost as more per lorry load.</b> 每辆卡车的运输成本更低。 <b>5. Easy to cut, drill and chase for conduits / services.</b> 易于切割、钻孔和追踪导管/设施。
	<b>Light weight Thermablock:</b> 轻质保温砖;  <b>Used for building and masonry work</b> 用于建筑和砖石工程  <b>Sizes:</b> 尺寸: <b>500 x 200 x 150mm 毫米    Weight of 重量重量 9 Kg</b> <b>Solid Block 实心块</b> <b>Coverage:</b> 覆盖范围 <b>10 pcs per square metre 每平方米10块</b> <b>67 pcs per metrecubic 67块/立方米</b>		<b>The application of thermablocks in external walls and internal dividing walls.</b> 应用于外墙和内隔墙保温砖 <b>1. High thermal &amp; sound insulation.</b> 高隔热隔音。 <b>2. Great saving on structural loading</b> 结构荷载节省量大 <b>3. Light weight, easy to handle (less handling costs) less manpower for loading and off-loading.</b> 重量轻，装卸方便（装卸成本低），装卸人员少。 <b>4. Cheaper transport cost as more per lorry load.</b> 每辆卡车的运输成本更低。 <b>5. Speedier construction, more output by man hours.</b> 施工速度更快，工时产量更高。

\* 所示價格可能有變動，請在訂購前確認。所示價格包括增值稅



PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Light weight Thermablock:</b> 轻质保温砖: <b>Used for building and masonry work</b>  用于建筑和砖石工程  <b>Sizes:</b> 尺寸: 500 x 200 x 100mm 毫米 <b>Weight of 重量</b> 重量 6 Kg <b>Solid Block 实心块</b>  <b>Coverage:</b> 覆盖范围  <b>10 pcs per square metre</b> 每平方米10块 <b>100 pcs per metre cubic</b> 每立方米100块		<b>The application of thermablocks in internal dividing walls or partition walls.</b>  应用于内隔墙或隔墙用保温砖  <b>1. Durable and long Lasting, non-moisture absorbent.</b> 经久耐用，不吸水。 <b>2. Less joints due to big sizes of blocks.</b> 块体尺寸大，接缝少。 <b>3. Uniform compressive strength for all blocks.</b> 所有砌块的抗压强度均匀。 <b>4. Less plaster thickness required only 10-15mm 毫米 thick.</b> 所需灰泥厚度较小 只有10-15毫米厚。
	<b>Light weight Thermablock;</b> 轻质保温砖: <b>Used for building and masonry work</b>  用于建筑和砖石工程  <b>Sizes:</b> 尺寸: 400 x 200 x 200mm 毫米 <b>Weight of 重量</b> 重量 6 Kg 公斤 <b>Hollow Block</b> 空心砌块  <b>Coverage:</b> 覆盖范围 <b>12.5 pcs per square metre</b> 每平方米12.5块 <b>63 pcs per metre cubic</b> 63块/立方米		<b>The application of thermablocks in external walls and internal dividing walls.</b>  应用于外墙和内隔墙保温砖  <b>1. High thermal &amp; sound insulation.</b> 高隔热隔音。 <b>2. Great saving on structural loading</b> 结构荷载节省量大 <b>3. Light weight, easy to handle (less handling costs) less manpower for loading and off-loading.</b> 重量轻，装卸方便（装卸费用少），装卸人员少。 <b>4. High fire resistance.</b>  耐火性高。
	<b>Light weight Thermablock:</b> 轻质保温砖 <b>Conduit Block</b> 导管架  <b>Sizes:</b> 尺寸: 400 x 200x x200mm 毫米 <b>Weight of 重量Kg</b> <b>Conduit Block 导管块</b>  <b>Coverage:</b> 覆盖范围 <b>12.5 pcs per square metre</b> 每平方米12.5块  <b>63 pcs per cubic metre</b> 63块/立方米		<b>The application of thermablocks in external walls and internal dividing walls.</b> □□□□□□□□□□  <b>1. High thermal &amp; sound insulation.</b> 高隔热隔音。 <b>2. Great saving on structural loading (Steel)</b> 结构荷载（钢）节省量大 <b>3. Durable and long Lasting, non-moisture absorbent.</b> 经久耐用，不吸水。 <b>4. Less plaster thickness required only 10-15mm 毫米 thick.</b> 仅需10-15mm厚的灰泥厚度。 <b>5. Speedier construction, more output by man hours.</b> 施工速度更快，工时产量更高。
	<b>Light weight Thermablock:</b> 轻质保温砖: <b>Edge block</b>  <b>Sizes:</b> 尺寸: 400 x 200 x 200mm 毫米 <b>Weight of 重量</b> 9 Kg <b>Edge Block 边缘块</b>  <b>Coverage:</b> 覆盖范围 <b>2.5 pcs per lenear metre</b> 每延米2.5块		<b>All above advantages for light weight blocks. This edge block can be used as beam with steel reinforcement.</b>  所有这些优点都适用于轻质砌块。此边缘块可用作配筋梁。  <b>1. Great saving on structural loading.</b> 结构荷载节省量大。 <b>2. Light weight, easy to handle (less handling costs) less manpower for loading and off-loading.</b> 重量轻，装卸方便（装卸费用少），装卸人员少。 <b>3. Great saving on structural loading.</b> 结构荷载节省量大。 <b>4. Speedier construction, more output by man hours.</b> 施工速度更快，工时产量更高。

\* Prices indicated are subject to change, please confirm before ordering. Prices indicated are inclusive of vat









PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Paving Blocks</b> 铺路砖 <b>Pavers Used for Roads, Driveways and footpaths.</b>  用于道路、车道和人行道的路面铺设。  <b>Sizes 尺寸:</b> <b>Light Duty 轻</b> <b>Medium Duty 中型</b> <b>Heavy Duty 重型</b>  <b>Weight:</b> <b>Light Duty 轻型 2.5 to 3Kg</b> □□ <b>Medium Duty 中型 3 to 3.5Kg</b> 公斤 <b>Heavy Duty 重型 4 to 4.5Kg</b> 公斤 <b>Coverage:</b> 覆盖范围 <b>Approximately</b> <b>Pieces Per square Metre Depending on the shape.</b>  根据形状，每平方米约40块。		<b>1. High Abrasion Resistance</b> 耐磨性高 <b>2. Aesthetic Design</b> 美学设计 <b>3. Durable</b> 耐用 <b>4. Long Life</b> 寿命长 <b>5. Maintenance Free</b> 免维护 <b>6. Easy Repair &amp; Replacement</b> 维修更换方便 <b>7. Easy Subservice Maintenance</b> 易于子服务维护 <b>Compressive Strengths:</b> 抗压强度:  <b>Light Duty - 25N/Mm2</b> <b>(loading upto 8 Tonnes)</b> 轻型-25N/mm2（负载高达8吨） <b>Medium Duty - 35N/Mm 2</b> <b>(loading upto Tonnes)</b> 中型-35N/mm2 (装载量高达20吨) <b>Heavy Duty - 49N/Mm2</b> <b>(loading upto Tonnes)</b> 重型-49N/mm2（负载高达40吨） <b>Available in Different Colours</b> 提供不同颜色
	<b>Kenbro colour pavers:</b> Kenbro 彩色铺路砖  <b>Used for Residential parkings and Driveways</b> 用于住宅停车场和车道  <b>Sizes:</b> 尺寸: 600 x 250x 50mm 毫米  <b>Weight:</b> 重量: 5 公斤 Kg  <b>33 Blocks per Square metre</b> 每平方米33块		<b>High Abrasion Resistance</b> 高耐磨 <b>Aesthetic Design</b> 美感设计 经久耐用 <b>Durable</b> 免维护 <b>Long Life</b> 易于维修和更换 <b>Maintenance Free</b> <b>Easy Repair &amp; Replacement</b> <b>Easy Subservice Maintenance</b>  <b>Strengths:</b> 优势: <b>Light Duty- 25N/Mm2 轻型-25N/mm2</b>  <b>Available in Different Colours</b> 提供不同颜色
	<b>Kenbro Paving Slabs:</b> Kenbro 铺路板  <b>Pavings slaps used as walkways in gardens on in footpaths</b> 人行道上用作花园人行道的铺路板  <b>Sizes:</b> 尺寸: 600 x 600x 50mm 毫米 <b>Weight:</b> 重量: 45 kg 公斤  <b>Coverage:</b> 覆盖范围 slab covers are of 600 x 600mm 盖板为 600 x 600 毫米		<b>High Abrasion Resistance</b> 高耐磨性 <b>Aesthetic Design</b> 审美设计 <b>Durable</b> 耐用 <b>Long Life</b> 长寿 <b>Maintenance Free</b> 免维护 <b>Easy Repair &amp; Replacement</b> 易于维修和更换 <b>Easy Subservice Maintenance</b> 易于子服务维护  <b>Available in Different Colours</b> 提供不同颜色
	<b>Kenbro Road Kerbs:</b> Kenbro 路缘石  <b>Used for Road side Boundaries</b> 用于道路边界线  <b>Sizes:</b> 尺寸: 900 x 250x 125mm 毫米  <b>Weight:</b> 重量: 65Kg 公斤  <b>Coverage:</b> 覆盖范围 <b>0.900 linear metre per piece</b> 每块0.900延米		<b>Kerbs also have an importance of ensuring that rain water flows to a drain where it can be safely moved away from public areas. There would be many more puddles if it wasn't for Kerbs.</b>  路缘石还具有确保雨水流入排水沟的重要性，排水沟可以安全地远离公共区域。如果不是路缘石的话会有更多的积水坑。

\* 所示價格可能有變動，請在訂購前確認。所示價格包括增值稅




PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Kenbro Road Channels:</b> Kenbro 公路通道		<b>Concrete channels are important to keep the paving blocks intact, as it acts as a support for the paving blocks for a firmer fix and avoid movement.</b>  混凝土通道对于保持铺路砖的完整性很重要，因为它可以作为铺路砖的支撑，以便更牢固地固定并避免移动。
	<b>Used for Road side Boundaries</b> 用于道路边界线  <b>Sizes:</b> 尺寸： 900 x 100 x 125mm 毫米  <b>Weight:</b> 重量： 40Kg 公斤 <b>Coverage:</b> 覆盖范围 0.900 linear metre per piece 每块0.900延米		
	<b>IBD or U Channel:</b> IBD 或U通道		<b>The IBD is used for storm water drainage and if the best option due to the shape helps you to clean it instead of concrete pipes or plastic pipes, which are prone to blockages.</b>  IBD用于雨水排放，形状的最佳选择有助于清洁，而不是容易堵塞的混凝土管道或塑料管道。
	<b>Precast U channel for drain water</b> 排水用预制U形槽  <b>Size:</b> 尺寸： 600 x 450x 230mm 毫米  <b>Coverage:</b> 覆盖范围 600mm 毫米 per piece. 每块600毫米。		
	<b>Shallow Drain:</b> 浅沟： Drain for shallow water drainage		<b>The shallow drain is used for storm water drainage for shallow water drainage where vehicles can pass over it and is used on the road itself or going across the road.</b>  浅排水沟用于雨水排放，浅排水，车辆可通过浅排水沟，用于道路本身或穿过道路。
	浅水排水沟  <b>Size:</b> 尺寸： 600 x 450x 230mm 毫米 460x 390x 100mm 毫米  <b>Coverage:</b> 覆盖范围 600mm 毫米 per piece. 每块600毫米。		
	<b>Kenbro Interlocking Tiles:</b> Kenbro 连锁瓷砖		<b>Concrete Interlocking tiles are mainly used for human traffic and also to protect the waterproofing layer underneath the tiles. Very famously used on where there are terraces.</b>  混凝土连锁砖主要用于人行交通，也可用于保护砖的防水层。在用于梯田的地方非常著名。
	<b>Used in flat roofs after laying Kenseal or App membranes</b> 用于铺设Kenseal或APP薄膜后的平屋顶  <b>Sizes:</b> 尺寸： 250x250x 18mm 250x250x 18毫米 每块  <b>Weight:</b> 重量： 2.5kg 公斤 <b>Coverage:</b> 覆盖范围 Pcs per square metre 每平方米16块		

\* Prices indicated are subject to change, please confirm before ordering. Prices indicated are inclusive of vat

PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Kencoat</b> Exterior and Interior wall Coating 内外墙涂料 <b>Styles</b> - rough and smooth textures 样式-粗糙和光滑的纹理 <b>Colour</b> - Any color can be achieved 颜色-任何颜色都可以实现  <b>Coverage:</b> 覆盖范围 2 to 3 Kg 公斤 per square metre depending on the thickness of the kencoat 每平方米2至3千克，取决于Kencoat的厚度 <b>Rough</b> - 175/- per Kg 粗糙-每公斤 <b>Smooth</b> - 200/- per Kg 光滑-每公斤		<b>Applied in one single coat, the coating is homogeniously coloured therefore the colour will not fade. Hides a lot of uneven surfaces and gives a maintenance free surface. It sticks to virtually any surface e.g- Concrete, Plaster, Stone, Bricks, Wood, Chip Board, Ply wood, Cardboard, MDF, Fibreglass, Metal, Steel, Polystrene etc. Application does not require any sort of priming or elaborate surface preparation nor does it require any curing after application.</b>  在每层涂层中，涂层颜色均匀，因此颜色不会褪色。隐藏许多不平整的表面，并且表面无需维护。它几乎适用于任何表面上，例如混凝土、灰泥、石砖、木材、刨花板、胶合板、纸板、中密度纤维板、玻璃纤维、金属、钢、聚苯乙烯等。应用不需要任何类型的底层涂料或精细的表面处理，也不需要任何养护。
	<b>Kenbro Polyflex Floor Tiles:</b> Kenbro Polyflex 地砖  PVC Tiles for decorative and high quality vinyl tiles PVC瓷砖用于装饰和高品质的乙烯基瓷砖  <b>Colour</b> - Different colours 颜色-12种不同颜色 1.5mm Thick  4.5 sq.meters per box of pcs 每箱50件4.5平方米 2mm Thick -Box 2毫米厚-3.24sq. meters per box of 36pcs 每箱36块3.24平方米		<b>Polyflex is an economical, general-purpose vinyl tile combining excellent performance with durability, ease of maintenance and endless design possibilities. Available in bright colours in traditional or duotone marbling decoration.</b>  <b>Polyflex</b> 是一种经济通用的乙烯基瓷砖，集卓越的性能、耐用性、易维护性和无限的设计可能性于一身。12种亮色可选，传统或双色调大理石装饰
	<b>Kenbro Kenflex Floor Tiles:</b> Kenbro Kenflex 地砖：  PVC Tiles for decorative and high quality vinyl tiles PVC瓷砖用于装饰和高品质的乙烯基瓷砖  <b>Colour</b> - 14 Different colours 1.2mm 毫米 Thick 颜色-14种不同颜色1.2毫米厚-每盒  <b>Coverage:</b> 覆盖范围 4.05 square metres per box of 45pcs 每箱45块4.05平方米		<b>Kenflex is an economical, general-purpose vinyl tile combining excellent performance with durability, ease of maintenance and endless design possibilities. Available in bright colours in traditional or duotone marbling decoration.</b>  Kenflex是一种经济通用的乙烯基瓷砖，集卓越的性能、耐用性、易维护性和无限的设计可能性于一身。14种亮色可选，传统或双色调大理石装饰。
	<b>Kenbro XLPU Vinyl Sheetting:</b> Kenbro XLPU 乙烯基片材：  Anti-static: 抗静电 PVC Sheetting for decorative and high quality vinyl sheetting 用于装饰和高品质的聚氯乙烯薄膜  <b>Colour</b> - 12 Different colours 颜色-12种不同颜色  <b>Coverage:</b> 覆盖范围 40 square metres 40平方米 <b>Roll of 2 metres x 20 metres</b> 卷2米x 20米		<b>XL PU, with its extensive proven pedigree, combines high performance with optimum style and enables the transformation of any commercial environment through the selection of vivid colours. Specially formulated polyurethane surface treatment, XL PU is available in a duotone marbleised decoration. XL PU features a polyurethane surface treatment which provides an excellent foundation for an easy, ongoing maintenance regime.</b>  XL PU拥有广泛成熟的血统，将高性能与最佳风格相结合，并通过选择鲜艳的颜色，实现任何商业环境的转变。特殊配方的聚氨酯表面处理，XL聚氨酯可用于双色调大理石装饰。XL PU的特点是聚氨酯表面处理，提供了一个良好的基础，为一个简单的，持续的维护制度。

\* 所示價格可能有變動，請在訂購前確認。所示價格包括增值稅









PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>KenRubber:</b> Ken橡胶 Cushion effect tiles made from foamed rubber 泡沫橡胶缓冲砖  <b>Sizes:</b> 尺寸： 600 x 600 x 20mm 毫米 -  <b>Colors:</b> Black, Grey, Red and Green 黑色、灰色、红色和绿色		<b>A Cushion effect tiles made from foamed rubber, for comfort whilst walking, playing or exercising on them. The tiles do not need to be stuck down with adhesive, as they interlock and are held in place firmly.</b>  由泡沫橡胶制成的缓冲效果瓷砖，在行走、玩耍或运动时提供舒适感。不需要用粘合剂粘住，因为它们互锁并牢牢固定。  <b>Ideal for:</b> 理想的使用地点：： 1. Nursery Schools 幼儿园 2. Gymnasium 体育馆 3. Indoor and Outdoor play area 室内外游乐场 4. Sport grounds 运动场地
	<b>Capping Strip:</b> 盖条： Used for finishing off upper edge of skirting. 用于修整 裙料。  <b>Size:</b> 尺寸： 20mm 宽 width x 20 meters long 长		<b>1. Tucks the floor finish to the wall. 隐藏地板与墙体接缝边缘。</b> <b>2. Hides the edges of the PVC flooring. 隐藏PVC地板边缘。</b> <b>3. Easy to clean and no sharp edge to collect dust. 清洁方便，无锋利的收尘边。</b> <b>4. Gives a neat finish to the installation and ensures a continuous, sealed surface. 呈现整洁安装，并确保一个连续的，密封的表面。</b>
	<b>Door Strip:</b> 门带： Used for finishing off the edge of PVC tiles or sheeting 用于修整 PVC瓷砖或薄板  <b>Size:</b> 尺寸： 25mm 宽 width x 30meters long 长		<b>1. They protect the floor material edge and reduce the risk of the junction becoming a trip hazard 保护地板材料边缘，降低交叉口绊倒的危险。</b> <b>2. Take the edge of an installed floor covering down to the base flooring. 将已安装的地板罩的边缘向下移动到底层地板。</b> <b>3. Door strips are protective edge trims which help to create a safe transition at floorcovering edges. 门条为保护性边缘装饰件，有助于在地板覆盖边缘形成安全过渡。</b> <b>4. It is easily installed, and because they are flexible they can be curved on site. 它很容易安装，而且因为它们很灵活，所以可以在现场弯曲。</b>
	<b>Step Nosing:</b> 阶跃： Used on the edge of the steps (thread side) 用于台阶边缘（螺纹侧）  <b>Size:</b> 尺寸： 50mm 毫米 x 25mm 毫米 x 2 meters long		<b>1. Used on the edge of the stairs to minimise trip hazard. Cover existing steps for added safety 用于楼梯边缘，以减少绊倒危险。覆盖现有步骤以增加安全性。</b> <b>2. They take the impact of the wear and tear and prolong the lifespan of your stairs, Minimizing the scuffs, scratches and stains that ruin the surface. 它们能承受磨损的冲击，延长楼梯的使用寿命，最大限度地减少磨损、刮痕和污渍，破坏楼梯表面</b> <b>3. Replacing these tread covers is much less costly than rebuilding a set of stairs, hence minimizing your maintenance costs. 更换这些踏板盖比重建一组楼梯要便宜得多，从而将维护成本降到最低。</b>

\* Prices indicated are subject to change, please confirm before ordering. Prices indicated are inclusive of vat









PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Skirting:</b> 裙料  <b>Black PVC Skirting fixed on the junction of the wall and floor.</b> 黑色PVC踢脚板 固定在墙壁和地板的接合处。  <b>Size:</b> 尺寸： 100 mm 毫米 width x 2 meters long 米长		<b>1. Installed up to 50% faster than traditional timber alternatives. 安装速度比传统木材替代品快50%。</b> <b>2. easy to clean and require almost no maintenance, unlike traditional wood skirting. 与传统木踢脚板不同，易于清洁，几乎不需要维护。</b> <b>3. long lasting material that can provide a high quality finish. 能提供高质量饰面的持久材料。</b> <b>4. Hide gaps between walls and floors, creating coves to avoid water sipping into the gaps. 隐藏墙壁和地板之间的间隙，形成凹形，以避免水渗入间隙。</b> <b>5. Can be used in both dry and wet areas 可用于干燥和潮湿区域。</b>
	<b>Coving strip</b> 凹条 Used for forming a cove between the wall and the floor. 用于墙壁和地板。  <b>Size:</b> 尺寸： 20mm 毫米 width 宽 x 2 meters long 米长		<b>1. Creates a coved skirting, PVC sheeting is extended up the wall, which creates a water tight base. 安装一个凹形踢脚板，PVC板延伸到墙上，从而创建一个防水的基础。</b> <b>2. coved up walls to produce hygienic and continuous floors. 成凹形墙壁，以形成卫生且连续的地板。</b> <b>3. It's often used in commercial buildings, hospitals and schools, especially in areas where hygiene is important or a watertight seal is necessary. 它通常用于商业建筑、医院和学校，特别是在卫生很重要或需要防水密封的区域。</b>
	<b>Kenbro PVC Water Bars:</b> Kenbro PVC 止水带： A pvc based pvc waterstop for waterproofing 聚氯乙烯防水止水带  <b>Sizes:</b> 尺寸： RG Flat - 150mm 毫米 - 200mm 毫米 - 250mm 毫米  RGF Centre Bulb 扁钢 - 150mm 毫米 - 200mm 毫米 - 250mm 毫米  <b>Packing:</b> 25 linear metre rolls 25延米滚轴		<b>Water bar when embedded in the concrete joints, acts as a continuous watertight diaphragm to prevent any seepage of liquids in constructions joints which are subject to hydrostatic pressure. It is designed for expansion or contraction joint, meanwhile, it can accommodate lateral and transverse movements which make it capable to suit the moving joints.</b>  当止水条嵌入混凝土接缝时，起到连续防水隔膜的作用，以防止施工缝中受静水压力影响的任何液体渗漏。它是为伸缩缝而设计的，同时它能适应横向和纵向运动，使其能够适应运动缝。
	<b>Kenbro Polytape:</b> Kenbro 维修胶带： Multipurpose repair tape 多功能维修胶带  <b>Packaging:</b> 包装： 6 inch x 10 metre roll 英寸x 10米 滚轴每滚轴  <b>Coverage:</b> 覆盖范围 Approximately 10 linear metre		<b>Polytape is a multipurpose repair tape used mostly for leaking roofs. It is a bitumen based self-adhesive tape with an aluminium foil finish to reflect the heat and light. It is smooth so it does not accumulate dirt. It can stick to almost any surface like concrete, metal, plastic, wood, glass e.t.c.</b>  聚乙烯胶带是一种多用途的维修胶带，主要用于屋顶漏水。它是一种沥青基自粘胶带，铝箔表面能反射光和热。它是光滑的，所以不会积聚灰尘。它几乎可以粘在任何表面，如混凝土、金属、塑料、木材、玻璃等。

\* 所示價格可能有變動，請在訂購前確認。所示價格包括增值稅



PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Keflex APP membrane:</b>  <b>Keflex APP 薄膜:</b> App rolls are a polymer Modified bitumen waterproofing membrane of the highest quality  APP轧辊是一种高质量的聚合物改性沥青防水薄膜。  <b>Packaging: 包装:</b> 1M x 10M x 4mm 毫米 Roll - Plain 轧辊-普通版 1M x 10M x 4mm 毫米 Roll - grey Mineral 轧辊-灰色矿物 1M x 10M x 3mm 毫米 Roll - plain 轧辊-普通  <b>Coverage: 覆盖范围</b> <b>9 Sqm Per Roll with overlaps</b> 每卷9平方米，有重叠		<b>App can be applied in:</b> APP可应用于：：  <b>1. Single or Double layer roofing systems for normal use</b> 正常使用的单层或双层屋顶系统 <b>2. Waterproofing wet areas like Toilets and inside a building where there are leakages.</b> 对卫生间等潮湿区域和有渗漏的建筑物内进行防水处理。 <b>3. Gutters and Drains</b> 排水沟和排水沟 <b>4. Sub-grade structures.</b> 路基结构。
	<b>Kenbro DPC membrane:</b>  <b>Kenbro DPC 薄膜:</b> <b>Damp proof corse</b>  防潮紧身衣  <b>Packaging: 包装:</b> 1M 米 x 7M 米 x 3mm 毫米 Roll - Sanded  <b>Coverage: 覆盖范围</b> <b>7 Sqm Per Roll.</b> 每卷7平方米。		<b>Used in: 用于:</b> <b>Foundation floors, RC walls, and boundary walls for waterproofing.</b>  基础底板，钢筋混凝土墙，以及防水边界墙
	<b>Kenbro Blow Torch:</b>  <b>Kenbro喷枪</b> <b>Torch used to heat APP rolls</b> 用于加热APP辊的焊炬  <b>Packaging: 包装:</b> 1 pcs in one packet		<b>A gas torch is a vital tool in laying a proper App roof. Properly applied, the torch allows the roof to be completely sealed, making for a cost effective and durable roof. It's a skilled process, and involves playing with a lot of heat. We strongly recommend hiring a professional rather than doing this yourself – if you make a mistake the risk of hurting yourself or severely damaging your property are extremely high.</b>  喷枪是放置合适应用程序屋顶的重要工具。如果使用得当，焊炬可以完全密封屋顶，使屋顶耐用减少成本。  这是一个技术娴熟的过程，需要大量的热量。我们强烈建议雇佣一名专业人士，而不是自己这样做-如果出现失误，伤害到自己或严重损坏你的财产的风险非常高。
	<b>Kenbro Marglass roll:</b> <b>Kenbro Marglass 卷:</b>  <b>Fibre netting used for waterproofing when applying colas and kenseal</b> 用于防水的纤维网  <b>Packaging: 包装:</b> <b>1Meter x 100 Meter roll</b>   <b>Coverage: 覆盖范围</b> <b>Covers up to 100sq.metre per roll</b> 每卷最多可覆盖100平方米		<b>Marglass Mesh is essential to reinforcing the External Insulating Finish System. It can provide the system with enough capacity to contain the movements, caused by thermal excursions or shrinkage, or the insulating material over time, preventing the formation of hairline cracks on the facade.</b>  玻璃纤维网是加强外部绝缘饰面系统的关键。它可以为系统提供足够的容量来容纳由于热偏移或收缩或绝缘材料随时间的推移而引起的移动，从而防止在立面上形成细裂缝。

\* Prices indicated are subject to change, please confirm before ordering. Prices indicated are inclusive of vat

PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Kenbro Roofing tiles:</b> <b>Kenbro屋顶瓦:</b>  <b>Metal coated roofing sheets</b> 金属涂层屋面板  <b>Size:</b> 尺寸: 1335mm 毫米m x 420mm 毫米  <b>Coverage:</b> 覆盖范围 <b>Covers approximately 2.1 tiles/metre2</b> 覆 盖大约2.1块瓷砖/平方米  <b>Colours Available:</b> 可用颜色:  Chest Nut 胸果                      - Oriental Red 东方红 Forest Green 森林绿           - Estate Grey 庄园灰		<b>Advantages of using roofing tiles</b> 使用屋面瓦的优点  <b>1. Light weight</b> 重量轻 <b>2. Thermal and Sound proof</b> 隔热隔音 <b>3. Wind Resistance</b> 抗风性 <b>4. Low life cycle cost</b> 周期成本低 <b>5. Fire Resistance</b> 耐火性 <b>6. Attractive Appearance</b> 外观美观 <b>7. 30 Years Warranty</b> 年保修 <b>8. Maintenance Free</b> 免维护
	<b>Kenbro Roofing Shingles:</b> <b>Kenbro屋顶瓦:</b> <b>Bitument asphalt shingles</b>  沥青！沥青瓦  <b>Size:</b> 尺寸: 333mm 毫米 x 1000mm 毫米  <b>Coverage:</b> 覆盖范围 <b>1 sq meter = 7pcs</b> 1平方米=7块 <b>Per Box 4 sq meter      = 22pcs</b>  每箱4平方米=22块  <b>Colours Available:</b> 可用颜色: <b>- Royal Red -Jasper -- Dark Grey</b> -皇家红-碧玉- 深灰色		<b>Advantages of using roofing shingles:</b> 使用屋面板的优点：  <b>1. Light weight</b> 重量轻 <b>2. Attractive Appearance</b> 外观美观 <b>3. Waterproof</b> 防水 <b>4. Easy to install</b> 安装方便 <b>5. Long Lasting</b> 持久 <b>6. Maintenance Free</b> 免维护
	<b>Kenbro Bitumen 115/15</b> <b>Kenbro 沥青115/15</b>  <b>oxidized bitumen</b> 氧化沥青  <b>Packaging:</b> 包装: 25Kg 公斤  <b>Used as:</b> 用途: <b>It is used for a lot of manufacturing</b> <b>processes making roofing felts, primers and</b> <b>also used in making roads.</b>  它用于许多制造业 制造屋顶毡、底层涂 料的工艺，也用于制造道路。		<b>Oxidized asphalt 115/</b> <b>are shipped cold in Bag and heating to</b> <b>become hot until used in the manufacturing</b> <b>process. Most blown bitumen 115/</b> <b>used to produce “mopping-grade” roofing</b> <b>asphalts. These bitumen 115/</b> <b>are generally shipped as a solid and heated</b> <b>in a kettle at the work site.</b>  氧化沥青115/15装在袋中冷运输，加热 变热，直到在制造过程中使用。大多数 吹制沥青115/15用于生产“抹平级”屋 顶沥青。这种沥青115/15通常作为固体 运输，并在工地的水壶中加热。
	<b>Bitumastic 沥青密封胶:</b> <b>Expansion joint sealant for roofs</b>  屋顶伸缩缝密封胶  <b>Packaging:</b> 包装: 20 Kg 公斤  <b>Coverage:</b> 覆盖范围 <b>Depending on the width and depth of</b> <b>expansion joint.</b>  取决于伸缩缝的宽度和深度。		<b>1. Applied as a sealant in the expansion</b> <b>joint to avoid water penetrating through</b> <b>the joint</b> 在伸缩缝中涂抹密封胶，避免水渗入 伸缩缝 <b>2. Flexible compound which allows the</b> <b>sealant to stretch and expand according</b> <b>to the buildings movement.</b> 柔性化合物，允许密封胶根据建筑物 的运动进行拉伸和膨胀。 <b>3. Dries to a soft rubber like material but</b> <b>not sticky.</b> 干燥至软橡胶状材料，但不粘黏。

\* 所示價格可能有變動，請在訂購前確認。所示價格包括增值稅



PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Kenflex Sealant PU</b> Kenflex密封剂PU Expansion joint sealant 伸缩缝密封胶  <b>Packaging:</b> 包装: 600 cc 毫升  <b>Coverage:</b> 覆盖范围 Depending on the width and depth of expansion joint. Priming is essential. 取决于伸缩缝的宽度和深度。底层涂层是必不可少的。		<ol style="list-style-type: none"><li>1. <b>Applied as a sealant in the expansion joint to avoid water penetrating through the joint</b> 在伸缩缝中涂抹密封胶，避免水渗入伸缩缝</li><li>2. <b>Flexible compound which allows the sealant to stretch and expand according to the buildings movement.</b> 柔性化合物，允许密封剂根据建筑物的运动进行拉伸和膨胀</li><li>3. <b>Dries to a soft rubber like material but not sticky.</b> 干燥至软橡胶状材料，但不粘。</li><li>4. <b>For internal interior application.</b> 用于内部应用。</li></ol>
	<b>Extruder Gun</b> 挤压枪:  <b>Gun for Kenflex sealant</b> Kenflex密封剂枪  <b>Packaging:</b> 包装: 1 - Gun. 1 - 枪体. 1 - Plastic nozzle. 1-塑料喷嘴.  <b>Cartridge Size:</b> 弹药盒尺寸: 600cc 毫升		<ol style="list-style-type: none"><li>1. <b>Used to hold the Kenflex sealant PU cartridge for easier application.</b> 用于固定Kenflex密封胶PU盒，以便于使用。</li><li>2. <b>Plastic Nozzel is included in the package for a neat and even application.</b> 包装中包括塑料喷嘴，以便整齐均匀地使用。</li><li>3. <b>A 600cc cartridge is to be used in the gun.</b> 600cc容量的胶盒可被用于该枪体。</li></ol>
	<b>Backer rod:</b> 泡沫棒: <b>Expansion joint sealant backing</b> 伸缩缝密封胶背衬 <b>Size:</b> 尺寸: 15mm 毫米 - Linear meter 线性仪表 20mm 毫米 - Linear meter 线性仪表 25mm 毫米 - Linear meter 线性仪表		<ol style="list-style-type: none"><li>1. <b>Used to fill cracks and gaps between building materials.</b> 用于填充建筑材料之间的裂缝和缝隙。</li><li>2. <b>The rod is used to ensure that the depth to be filled the sealant is half the width of gap to be filled</b> 泡沫棒的作用是确保密封剂的填充深度为待填充间隙宽度的一半。</li><li>3. <b>The rods have bond breaking properties hence do not bond with the sealant.</b> 泡沫棒有断键特性，因此不与密封剂粘合。</li><li>4. <b>the sealant only bonds with the building material hence preventing triple bonding.</b> 密封剂仅与建筑材料粘合，因此防止了三重粘合。</li></ol>
	<b>Expanded Insulation Board:</b> 膨胀绝缘板 <b>Expanded polystyrene insulating board</b> 发泡聚苯乙烯保温板  <b>Size:</b> 尺寸: 120cm x 60cm x 5cm		<ol style="list-style-type: none"><li>1. <b>Thermal board for heat proofing on flat roofs.</b> 平屋顶隔热板。</li><li>2. <b>For cold storage rooms, insulation in walls and floor</b> 对于冷藏室，墙壁和地板隔热。</li><li>3. <b>Hot water piping insulation.</b> 热水管道保温。</li><li>4. <b>It is practically impervious to water.</b> 几乎不透水。</li></ol>

\* Prices indicated are subject to change, please confirm before ordering. Prices indicated are inclusive of vat

PRODUCT Name 產品名稱		APPLICATION AREA AND BENEFITS 應用領域和優勢	
	<b>Hyperseal</b> 超密封 <b>Hydrophilic waterstop creates an effective compression joint when in contact with water, it swells up to 300% to create a compressed seal.</b>  亲水止水带在与水接触时产生有效的压缩连接，膨胀到300%，形成压缩密封。  <b>Size:</b> 尺寸: 15meters roll 米每卷		<ol style="list-style-type: none"><li>1. <b>Active protection when in contact with water.</b> 与水接触时的主动保护</li><li>2. <b>Simple application - can be nailed or suitable adhesive.</b> 简单应用-可以钉住或使用合适的粘合剂。</li><li>3. <b>Slow expansion to prevent damage on concrete</b> 缓慢膨胀，防止混凝土受损</li><li>4. <b>Retains original shape after repeated contraction.</b> 反复收缩后保持原有形状。</li><li>5. <b>Swelling properties does not affect the strip in the long run.</b> 从长远来看，膨胀性能不会影响带钢。</li><li>6. <b>Sustains effective seal in wet conditions.</b> 在潮湿条件下保持有效密封。</li></ol>
		<b>Official suppliers of BASF &amp; COLAS products in Kenya.</b> 恩雅巴斯夫和科拉斯产品的官方供应商。	
	<b>PVC SHEETING</b> PVC 护墙板		<b>EPOXY</b>
	<b>PAVING BLOCKS</b> 铺路 积木		<b>UCRETE</b>
	<b>PVC TILES</b> 蒂尔曼		<b>KENSEAL</b>
			<b>TILE ADHESIVE</b> 瓷砖粘合剂
			<b>MANHOLE</b> 沙井

\* 所示價格可能有變動，請在訂購前確認。所示價格包括增值稅



# WHERE TO FIND US

COME VISIT US.

联络地址欢迎来访




Head Office - Wambugu road off Limuru road.

总部“ 距离Wambugu路不远的Limuru路



Factory - Mombasa road

工厂“ Mombasa 路

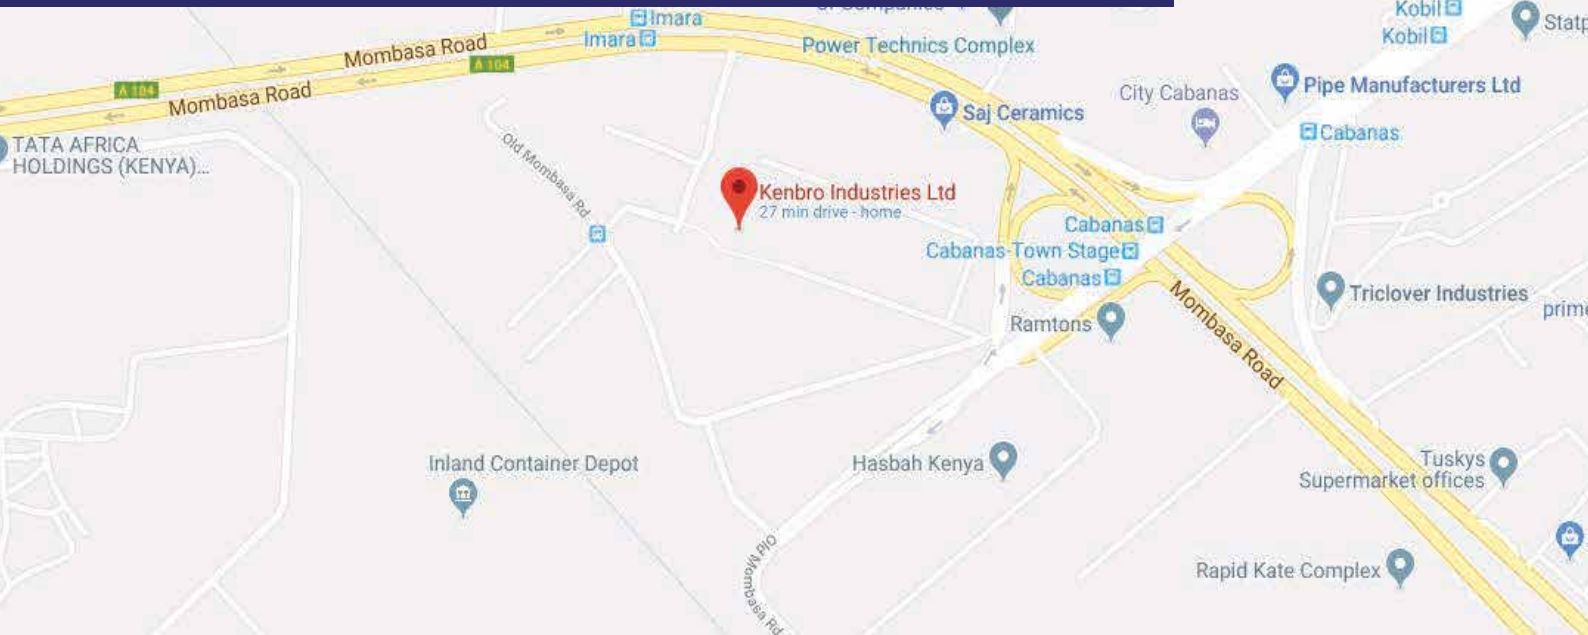

总部

HEAD OFFICE

FACTORY

工厂

Corner of Wambugu Road and Limuru Road  
Wambugu路与Limuru路转角处

电话: Telephone:  
(020) 242 2242/3  
(020) 243 3383/5

移动电话: Mobile:  
0724 255 674  
0735 633 199

info@kenbro.co.ke  
www.kenbro.co.ke

Off Mombasa Road  
位于MOMBASA路

Telephone: 电话:  
(020) 354 7945/6/7  
(020) 820 420

Mobile: 移动电话:  
0733697959  
0733697959

info@kenbro.co.ke  
www.kenbro.co.ke

周一至周五: 早八点至晚五点 Monday to Friday - 8:00 AM to 5:00 PM  
周六: 早八点至下午一点 Saturday - 8.00AM to 1.00PM

Monday to Friday - 8:00 AM to 5:00 PM 周一至周五: 早八点至晚五点  
Saturday - 8.00AM to 1.00PM 周六: 早八点至下午一点