



KENBRO

WE ARE YOUR SOLUTION

WATERPROOFING, FLOORING AND CONSTRUCTION SOLUTIONS
FOR ANY BUILDING PROJECTS

1st January 2020















Kenbro Waterproofing Products

- Kenseal 1K .1
- waterproofing membrane .2
- Hyseal Waterproofing cement .3
- Kenseal Roof waterproofing .4
- Hyseal 501 | Hyseal 501 Admix | Kenseal 550K .5
- Hyseal 501 | Hyseal 501 Admix | Hyseal 505 .6
- Kenseal 550K | Kenflex 3 .7
- Epoxy waterproof flooring .8
- Kensealer .9

Kenbro Other Products













- 10. Kencoat wall coating
- 11. Kentop Hard
- 12. Kenbro Paving blocks
- 13. Skim coat
- 14. Ceramic tile Adhesive
- 15. Kenbro Tile Grout
- 16. Kenbro PVC tiles and PVC Sheeting
- 17. Kenbro Self-leveling cement
- 18. Kenbro Interlocking cement tiles

| PRODUCT IMAGE | PRODUCT NAME | APPLICATION AREA | BENEFITS |
|---|--|--|--|
|  | Hyseal 501 A crystalline waterproofing compound, with active chemicals and additives to improve the water resistance of all RC structure. Packaging: 20Kg- 5000/- Coverage: 0.75 kg per coat, brush applied. Total two coats application. |  | <ol style="list-style-type: none"> 1. This is a multipurpose compound used for both casting concrete and plaster works. 2. Compatible with all sorts of concrete with admixtures or without. 3. Works best with concrete as it penetrates into the concrete to seal all the micro pores that allow water to penetrate through. 4. Economical waterproofing solution to reduce extra costs after the casting has been done. |
|  | Hyseal Admixture A crystalline chemical waterproofing for reinforced concrete structures to be mixed with concrete. Packaging: 1 Kg - 290/- Coverage: An average of 6 Kgs/cubic Meter OR 1Kg bag/50Kgs bag of Cement |  | <ol style="list-style-type: none"> 1. Concrete water tanks 2. Foundation and building basements 3. Sewage and water treatment plants 4. Swimming Pools & Water Ponds 5. Concrete Pipes 6. Waterproofs the entire depth of the Concrete Slab or wall. |
|  | Hyseal Waterproof Cement A waterproofing compound, with active chemicals and additives to improve the water resistance of the structure. To be mixed with cement plaster Packaging: 1 Kg - 87/- Coverage: 1 Kg Bag to be added with 50Kg of Cement |  | <ol style="list-style-type: none"> 1. Economical waterproofing solution to reduce water absorption. 2. Compatible with all sorts of concrete & plaster enders 3. Works best with concrete structures |
|  | Hyseal 505 A patching and plugging compound for water leakages. It is a blend of active chemicals to stop water leakages from any concrete structure Packaging: 1 Kg - 700/- 5 Kg - 3480/- Coverage: As per the size of the leakage, depending on the user. |  | <ol style="list-style-type: none"> 1. Hyseal 505 is an instant water plugging compound to stop water leakages instantly 2. Can plug and patch any concrete surface that is leaking 3. Does not need any complicated tools or equipment easy to use. Just add water to form a dough and apply as a plug. |
|  | Kenseal primer & sealer Priming, Curing, Sealing & Protecting Coating for concrete surfaces. Packaging: 5 litres - 2500/- 20 litres - 9900/- Coverage: This will depend on the nature of the concrete surface. For smooth surface 1 liter of primer will cover between 5-7 square meter |  | <ol style="list-style-type: none"> 1. Used as a primer before application of Kenseal waterproofer 2. Can be applied on fresh concrete as a curing agent 3. Can be applied as a seal coat on stones, Mazeras slabs & cement tiles |
|  | Kenseal PU A liquid applied waterproof coating. A Seamless, Jointless, and continuous Flexible Coating / reinforced with P.U. Packaging: 4Kg Bucket - 1500/- 20Kg Bucket - 7500/- Coverage: Approximately 1/2 KG per Sqm per coat. Required a four coat application. |  | <ol style="list-style-type: none"> 1. Kenseal PU applied on flat roofs, gutters, balconies and terraces. 2. If subsequently covered by other finishes, it will have a longer life span. 3. Very good UV resistance. 4. Can be applied on any shape. 5. White colour reflects the heat. 6. Can be made in any colour, as per the customers requirement. |





*** PRICES INDICATED ARE SUBJECT TO CHANGE, PLEASE CONFIRM BEFORE ORDERING. PRICES INDICATED ARE INCLUSIVE OF VAT**

| PRODUCT IMAGE | PRODUCT NAME | APPLICATION AREA | BENEFITS |
|---|---|--|---|
|  | Kenbro Kenseal 1K A cementitious chemical waterproofing for Stone Walls & Brick Works. To be applied on the positive side. Packaging: 18 Kg - 6500/- Coverage: Approximately 1 to 1.5 Kgs per Sq.mt per coat depending on the surface to be applied on. Two coats application. |  | <ol style="list-style-type: none"> 1. Stone walls 2. Concrete 3. Brick work 4. light Weight Therma Blocks 5. Ideal for water tanks & ponds 6. Safe for potable water |
|  | Kenbro kenseal 550K An Acrylic Cement Based Waterproof Slurry Coat. Packaging: Part A Liquid - 7 Litres Part B Powder - 21 Kg } 4500/- Per set Coverage: Approximately 1 to 1.5 Kgs per Sq.mt per coat depending on the surface to be applied on. 2 coats application. |  | <ol style="list-style-type: none"> 1. Swimming pools 2. Ponds 3. Gutters 4. Drainage systems 5. Safe for potable water. <p>Two coat Application is jointless and looks sleek, used where there is stagnant water.</p> |
|  | KenFix3 Liquid copolymer latex Packaging: 5 litre - 1600/- 20 litres - 6250/- 200 litres - 60,000/- Coverage: 5ltr of kenfix3 for every bag of OPC cement for normal use as a bonding agent. For Critical area increase to 10litres for every bag of 50kg cement, as an admixture for mortar. |  | <p>As bonding agent apply as a tack coat on the old surface to receive new floor or wall finish. As waterproofing agent mix 5 litres per bag of cement in the plaster mix. For High abrasion in the floor, add 5-10litres per bag of cement in the screed.</p> <p>A 3 fold advantage in this compound.</p> <ol style="list-style-type: none"> 1. Bonding agent 2. Waterproofing agent 3. High abrasion & compressive strength. |
|  | Kenomix P1 Packaging: 5 litres - 500/- 20 litres - 2000/- 200 litres - 20,000/- Coverage: A dosage of 300 to 500ml per 100kgs of cement is recommended. Should not be added to dry cement. |  | <p>Used as an Admixture in concrete for water reduction in the mix there by, maintains water cement ratio and achieve high concrete strength.</p> <p>Used as a pumping aid as well. When mixing the concrete, add half the required water, then add the required dose of Kenomix P1.</p> <p>Thereafter, add little water for the required flowability in the concrete mix.</p> |
|  | Bitumen Primer BF 4 Solvent based bitumen primer Packaging: 5 litres - 1160/ 20 litres - 4292/- Coverage: 6.6 sq/m - Per litre. BF4 primer is applied before application of APP membrane |  | <p>Applied as a primer on roof Screed before application of APP waterproofing membrane can be applied as a protective paint to metal.</p> |
|  | Bituminous Aluminum Paint High grade roofing alluminium paint for sealing all bituminous roof finishes. Packaging: 4 litres - 1740/- 20 litres - 7801/- Coverage: 1.5sq/m per litre depends on surface applied on. |  | <p>To be applied on all Bitumenous roof waterproofing systems,</p> <p>Eg. On APP, Colas or Ashphalt waterproofing.</p> |

* PRICES INDICATED ARE SUBJECT TO CHANGE, PLEASE CONFIRM BEFORE ORDERING. PRICES INDICATED ARE INCLUSIVE OF VAT

| PRODUCT IMAGE | PRODUCT NAME | APPLICATION AREA | BENEFITS |
|---|---|--|---|
|  | Ceramic Tile Adhesive Powder A wall and floor adhesive for ceramic tiles. Packaging: 25 Kg Bag - 600/- Coverage: Approximately 1/2 Sq.m per kg depending on the surface applied on. |  | Applied on: 1. plastered surface 2. concrete floors |
|  | Premium grade Adhesive Powder A wall and floor adhesive for porcelain and granito tiles. Packaging: 25 Kg Bag - 1000/- Coverage: Approximately 1/2 Sq.m per kg depending on the surface applied on. |  | Applied on: 1. Plastered surface 2. Concrete Floors |
|  | Tile Grout Ceramic Wall & Floor tiles joint Filler Packaging: 1 Kg Bag - 100/- 3 Kg Bag - 180/- 5 Kg Bag - 250/- Coverage: Will depend on the size of the gap |  | 1. High water resistance 2. 2mm to 8mm Joint width 3. Internal & External use 4. Easy to apply & clean 5. Mould resistant 6. Can be used on Ceramic, Porcelain & Granito tiles joints. |
|  | Self Levelling Compound Self Levelling Cement Compound Packaging: 25 Kg Bag - 1325/ Coverage: Approximately 1 litre per sq.mtr/mm thickness. |  | 1. Leveling rough concrete floors by a cement topping. 2. Finds it's on level 3. A very smooth surface is created 4. After application can be covered by subsequent floor finishes like ceramic tiles, PVC vinyl flooring, laminates and wooden floor. |
|  | Skim Coat Smoothing wall Finish Packaging: 25 Kg Bag - 500/- Coverage: Approximately 1.3 Sq.m per Kg depending on the thickness to be applied. |  | 1. Smooth textured substrates 2. Adhere on plastered Surfaces 3. Can be painted on after 24 hours 4. Filler & joint compound 5. Up to 5mm coat 6. Can be coloured |
|  | Kentop Hard Concrete Floor hardener Packaging: 25 Kg Bag - 850/- Coverage: Medium duty wear 6kg/sq.meter Heavy duty wear 8kg/sq.meter |  | 1. Applied as a dry shake over fresh concrete. 2. Hard wearing surface for heavy traffic. 3. Can be applied indoor and outdoor. 4. If power floated gives a perfect leveled and smooth concrete |

*** PRICES INDICATED ARE SUBJECT TO CHANGE, PLEASE CONFIRM BEFORE ORDERING. PRICES INDICATED ARE INCLUSIVE OF VAT**

| PRODUCT IMAGE | PRODUCT NAME | APPLICATION AREA | BENEFITS |
|---|--|--|--|
|  | Polyflex Wood Glue: A PVA Based tile adhesive highly recommended for sticking wood to wood Packaging: 4 Kg - 522/- 20 Kg - 2030/- Coverage: Approximately 1/2 Sq. M per Kg depending on the surface it is applied on. |  | Polyflex Wood glue is a thick creamy based compound specially designed to bond wood, |
|  | Polyflex Pvc Tile Adhesive An acrylic based tile adhesive used for PVC Tiles and Vinyl sheeting. Packaging: 4 Kg - 990/- 20 Kg - 4700/- Coverage: Approximately 3.5 Sq. M per Kg depending on the surface it is applied on. |  | Creamy acrylic based compound specifically designed to bond flexible tiles to concrete and wooden surfaces. It may also be used for bonding wooden, parquets to floors, expanded polystyrene ceilings and walls. Fibreglass insulations to walls |
|  | Polyflex GF86 Tile Adhesive: A PVA based tile adhesive used for PVCTiles Packaging: 4 Kg - 638/- 20 Kg - 2436/- Coverage: Approximately 3.5 Sq. M per Kg depending on the surface it is applied on. |  | White PVA based compound specifically designed to bond Rigid tiles manufactures to concrete and wooden surfaces. |
|  | Polyflex Parquet Adhesive: A PVA based parquet adhesive Packaging: 4 Kg - 638/- 20 Kg - 2436/- Coverage: Approximately 3.5 Sq. M per Kg depending on the surface it is applied on. |  | Polyflex parquet adhesive is a thick creamy based compound specially designed to bond parquet to concrete and wooden surfaces. It may also be used for bonding of tiles to floors. |
|  | Polyflex PVC Tile Adhesive: A Bituminous based Tile Adhesive Packaging: 4 Kg - 870/- 20 Kg - 3480/- Coverage: Approximately 3.5 Sq. M per Kg depending on the surface it is applied on. |  | Polyflex Bitumen based tile adhesive is a thick Black based compound specially designed to bond floor tiles to concrete surfaces. it can also be used to stick parquet/wood blocks to concrete floors. |
|  | Polyflex Ceramic Tile Adhesive: An PVA Based tile adhesive highly recommended for ceramic tiles Packaging: 4 Kg - 522/- 20 Kg - 2030/- Coverage: Approximately 1/2 Sq. M per Kg depending on the surface it is applied on. |  | Polyflex Ceramic tile adhesive is a thick creamy based compound specially designed to bond Ceramic tiles to concrete surfaces |

*** PRICES INDICATED ARE SUBJECT TO CHANGE, PLEASE CONFIRM BEFORE ORDERING. PRICES INDICATED ARE INCLUSIVE OF VAT**

| PRODUCT IMAGE | PRODUCT NAME | APPLICATION AREA | BENEFITS |
|---|--|--|--|
|  | Kenjit: APVC Pipe Adhesive 100ml - 150/- 250ml - 230/- 500ml - 380/- 1L - 775/- |  | PVC pipe joint Adhesive, which has a high performance resistance and offers Instant Adhesion. |
|  | Polyflex Rooftex Caulking Compound: A Multi-purpose bitumen roof sealer Packaging: 4 Kg - 1508/- 20 Kg - 5336/- |  | This Sealant can be used for sealing cracks, holes and joints. Also for repairing of drains, downpipes, flashings, skylights, ventilators, parapet walls, asbestos cement sheets, iron sheets and will stick to most surfaces. |
|  | Polyflex Strong bond Contact Adhesive: Packaging: 5 Kg - 2146/- 20 Kg - 10,440/- Coverage: Approximately 1/2 Sq. M per Kg depending on the surface it is applied on. |  | Polyflex multipurpose Strong Adhesive, is a thick creamy rubberised high quality adhesive designed to bond wood, formica, plastic linoleum, and PVC floor tiles. It can also be used to repair leather products and upholstery. |
|  | Bituseal T3: Bitumen Emulsion Packaging: 4kg - 1000/- 20kg - 4100/- |  | A Bituminous Waterproofing emulsion coating for: <ol style="list-style-type: none"> 1. Flat roofs 2. Patching Pot holes 3. Re-surfacing worn out or uneven floors 4. Platforms 5. Walk-ways |
|  | Bituseal T5: Bitumen Emulsion Packaging: 4kg - 1050/- 20kg - 4200/- |  | A Fibrated Waterproofing Emulsion Coating acting as a barrier to water and moisture. Used mainly to waterproof: <ol style="list-style-type: none"> 1. Roofing Felt 2. Concrete/Cement Surfaces 3. Mastic Asphalt 4. Corrugated Iron sheets/metal protection 5. Slate Tiles 6. Shingles roof |
|  | Bituseal T7: Heavily Fabricated Bitumen Emulsion Packaging: 4kg - 1100/- 20kg - 4300/- |  | A Heavy Duty Waterproofing Bitumen Emulsion Coating acting as a protective layer. Used as a heavy abrasion resistant waterproofing over insulation on: <ol style="list-style-type: none"> 1. Tanks 2. Pipes 3. Vessels 4. Boilers |

*** PRICES INDICATED ARE SUBJECT TO CHANGE, PLEASE CONFIRM BEFORE ORDERING. PRICES INDICATED ARE INCLUSIVE OF VAT**

| PRODUCT IMAGE | PRODUCT NAME | APPLICATION AREA | BENEFITS |
|--|---|--|--|
|  | Bituseal Cold: Bitumen Rubber Mastic Sealant Packaging: 20kg - 7700/- |  | A single Component Bitumen rubber mastic sealant applied when cold. Ideally suited for sealing and filling gaps & joints on roofs, (expansion joints). |
|  | Bituflex: Rubberised Bitumen Sealant Packaging: 28kg - 9000/- |  | Rubberised Bitumen that needs to be heated in order to be poured on expansion joints and cracks on concrete floors or tarmac roads. Highly flexible, mostly used for outdoor joints. |
|  | Car Underseal: Rubberised Bitumen Emulsion Packaging: 4kgs - 1200/- |  | A stabilized emulsified bitumen compound coating used to protect the underside of Motor Vehicles against: <ol style="list-style-type: none"> 1. Corrosion 2. Dust Barrier 3. Some degree of sound proofing. |
|  | Kenbro Polysynthetic Manhole Cover: Used for Sewage Drains, Electric ducts and water tank Covers Capacity & Size: A 15 - 1.5 Tonne - 600x450 (18" x 24") - 1800/ 1.5 Tonne - 450x450 (18" x 18") - 1000/ 1.5 Tonne - 300x300 (12" x 12") - 800/- For off the road installation. |  | Polysynthetic or fiber Reinforced manholes is a combination of really high quality material. <ol style="list-style-type: none"> 1. Weatherproof, waterproof and non-corrosive. 2. Buglar proof, no re-sale value 3. High strength to weight ratio 4. Light weight - ease of handling, low transport cost. |
|  | Kenbro Polysynthetic Manhole Cover: Used for Sewage Drains, Electric ducts and water tank Covers Sizes: 450 x 600mm - (18"x 24") - 4000/- 450 x 900mm - (18" x 36") - 13,000/- Capacity: A 50 - 5 Tonne |  | For private driveways - Light vehicles. Polysynthetic or fiber Reinforced manholes is a combination of really high quality material. <ol style="list-style-type: none"> 1. Weatherproof, waterproof and non-corrosive. 2. Buglar proof, no re-sale value 3. High strength to weight ratio 4. Light weight - ease of handling, low transport cost. |
|  | Kenbro Polysynthetic Manhole Cover: Used for Sewage Drains, Electric ducts and water tank Covers Sizes: 600 x 600 mm (24"x 24") - 8000/- Capacity: 1.5 Tonne |  | Polysynthetic or fiber Reinforced manholes is a combination of really high quality material. <ol style="list-style-type: none"> 1. Weatherproof, waterproof and non-corrosive. 2. Burglar proof, no re-sale value 3. High strength to weight ratio 4. Light weight - ease of handling, low transport cost. |













*** PRICES INDICATED ARE SUBJECT TO CHANGE, PLEASE CONFIRM BEFORE ORDERING. PRICES INDICATED ARE INCLUSIVE OF VAT**

| PRODUCT IMAGE | PRODUCT NAME | APPLICATION AREA | BENEFITS |
|--|--|--|---|
|  | Kenbro Polysynthetic Manhole Cover: Used for Storm water Drains, Electric ducts and water tank Covers. Sizes: Ø 530mm - 8000/- Capacity: 5 Tonne |  | Polysynthetic or fiber Reinforced manholes is a combination of really high quality material. 1. Weatherproof, waterproof and non-corrosive. 2. Buglar proof, no re-sale value 3. High strength to weight ratio 4. Light weight - ease of handling, low transport cost. |
|  | Kenbro Polysynthetic Manhole Cover Used for storm water Drains, Electric ducts and water tank Covers Capacity & Sizes: Ø 530 mm - 20 Tonnes - 20,000/ Ø 250 mm - 1.5 Tonnes - 1500/- |  | Polysynthetic or fiber Reinforced manholes is a combination of really high quality material. 1. Weatherproof, waterproof and non-corrosive. 2. Buglar proof, no re-sale value 3. High strength to weight ratio 4. Light weight - ease of handling, low transport cost. |
|  | Kenbro Polysynthetic Manhole Cover: Used for Sewage Drains, Electric ducts and water tank Covers Sizes: Triangle 600 mm - 25,000/- Capacity: 20 Tonne |  | Polysynthetic or fiber Reinforced manholes is a combination of really high quality material. 1. Weatherproof, waterproof and non-corrosive. 2. Buglar proof, no re-sale value 3. High strength to weight ratio 4. Light weight - ease of handling, low transport cost. |
|  | Kenbro Polysynthetic Drainage Cover: Used for Sewage Drains, Electric ducts and water tank Covers Sizes: 350 x 500 mm - (14"x 20") - 2800/- Capacity: 1.5 Tonne |  | A heavy Duty Polysynthetic or fiber Reinforced drain covers is a combination of really high quality material. 1. Weatherproof, waterproof and non-corrosive. 2. Buglar proof, no re-sale value 3. High strength to weight ratio 4. Light weight - ease of handling, low transport cost. |
|  | Kenbro Polysynthetic Drainage Cover: Used for Storm water Drains, Electric ducts and water drainage channels. Sizes: 500 x 550mm - (14"x 22") - 4640/- 250 x 550mm - (10"x 22") - 2320/- Water drainage Grating Capacity: |  | 1.5 Tonne A light duty Polysynthetic or fiber Reinforced drain cover is a combination of really high quality material. 1. Weatherproof , waterproof and non-corrosive. 2. Buglar proof, no re-sale value 3. High strength to weight ratio 4. Light weight - ease of handling low transport cost. |
|  | Earth Pit: Fibre glass chamber for protecting electric earth rods. Size: 300mm x 300mm x 300mm - 2000/- Cannot be used in heavy traffic areas, especially where cars may pass. |  | 1. Offers a high level of protection for critical grounding terminations 2. Ease of maintenance of the ground termination 3. Easy to identify with embossed lid detail. |

* PRICES INDICATED ARE SUBJECT TO CHANGE, PLEASE CONFIRM BEFORE ORDERING. PRICES INDICATED ARE INCLUSIVE OF VAT

| PRODUCT IMAGE | PRODUCT NAME | APPLICATION AREA | BENEFITS |
|--|---|--|---|
|  | Kenpoxy Primer 200: An Epoxy primer applied to concrete surface to receive subsequent epoxy overlays. Packaging: PART A 12.56 Kg } 11,020/- per set PART B 11 litres } Mix well before use. Apply with a roller, paint brush after cleaning the surface thoroughly. |  | <ol style="list-style-type: none"> 1. A primer for bonding Epoxy overlays 2. Can be applied as a dust proofer coating on floor screeds 3. Can be applied on hairline cracks to seal off the surface |
|  | Kenpoxy 210 Car Park Coating Packaging: 26.46 Kg - 13,920/- per set |  | A coating to create aesthetic floor coating. Can be used on: <ol style="list-style-type: none"> 1. Underground car park 2. parking lots/driveways 3. Available in white, yellow and black colours |
|  | Kenpoxy 230 An Epoxy self-smoothing overlay for floors where a very smooth & hardwearing surface is required. Packaging: 38.46 Kg 4 PART Component or- 11,600/- 21 litres Applied in thickness of 2mm to 4mm |  | An Epoxy overlay system for: <ol style="list-style-type: none"> 1. Food factories 2. Pharmaceutical industries 3. Milk Dairies 4. Laboratories 5. Printing press 6. Garage floors 7. Coffee/tea factories 8. Horticultural pack houses |
|  | Kenpoxy 240 An Epoxy screed for a hard wearing floor. Packaging: 4 PART Component 31.4 Kg } 5800/ 14.5 litres } Applied in thickness of 3mm to 12mm, depending on the floor usage. |  | An Epoxy floor screed for a very hard wearing surface <ol style="list-style-type: none"> 1. Heavy Industrial floors 2. Engineering workshops 3. Forklift areas 4. Non-slip wet areas |
|  | Kenpoxy 2200 Epoxy Repair Mortar Packaging 3Kgs set - 1395/- |  | Two component, which is finely filled and quick to dry/cure. It is Designed for surface repair: <ol style="list-style-type: none"> 1. Cracks 2. Gap filling 3. Grouting 4. Bedding fixtures/Bridge bearings |
|  | Light weight Thermablock Used for building and masonry work Sizes: 500 x 200x x200mm Weight of 14 Kg Solid Block - 190/- Coverage: 10 pcs per square metre 10 50 pcs per cubic metre 50 |  | The application of therma blocks in external walls and internal dividing walls. <ol style="list-style-type: none"> 1. Extremely light weight compared to concrete blocks, stones or bricks. 2. High thermal & sound insulation. 3. High fire resistance 4. Cheaper transport cost as more per lorry load. 5. Easy to cut, drill and chase for conduits / services. |













*** PRICES INDICATED ARE SUBJECT TO CHANGE, PLEASE CONFIRM BEFORE ORDERING. PRICES INDICATED ARE INCLUSIVE OF VAT**

| PRODUCT IMAGE | PRODUCT NAME | APPLICATION AREA | BENEFITS |
|---|--|--|--|
|  | Light weight Thermablock: Used for building and masonry work Sizes: 500 x 200 x 150mm Weight of 13.5 Kg Solid Block - 140/- Coverage: 10 pcs per square metre 67 pcs per metrecubic The application of thermablocks in external |  | walls and internal dividing walls. <ol style="list-style-type: none"> 1. High thermal & sound insulation. 2. Great saving on structural loading 3. Light weight, easy to handle (less handling costs) less manpower for loading and off-loading. 4. Cheaper transport cost as more per lorry load. 5. Speedier construction, more output by man hours. |
|  | Light weight Thermablock: Used for building and masonry work Sizes: 500 x 200 x 100mm Weight of 10 Kg Solid Block - 100/- Coverage: 10 pcs per square metre 100 pcs per metre cubic The application of thermablocks in internal |  | dividing walls or partition walls. <ol style="list-style-type: none"> 1. Durable and long Lasting, non-moisture absorbent. 2. Less joints due to big sizes of blocks. 3. Uniform compressive strength for all blocks. 4. Less plaster thickness required only 10-15mm thick. |
|  | Light weight Thermablock; Used for building and masonry work Sizes: 400 x 200 x 200mm Weight of 8 Kg Hollow Block - 145/- Coverage: 12.5 pcs per square metre 63 pcs per metre cubic |  | The application of thermablocks in external walls and internal dividing walls. <ol style="list-style-type: none"> 1. High thermal & sound insulation. 2. Great saving on structural loading 3. Light weight, easy to handle (less handling costs) less manpower for loading and off-loading. 4. High fire resistance. |
|  | Light weight Thermablock: Conduit Block Sizes: 400 x 200x 200mm Weight of 8 Kg Conduit Block - 145/- Coverage: 12.5 pcs per square metre 63 pcs per cubic metre |  | The application of thermablocks in external walls and internal dividing walls. <ol style="list-style-type: none"> 1. High thermal & sound insulation. 2. Great saving on structural loading (Steel) 3. Durable and long Lasting, non-moisture absorbent. 4. Less plaster thickness required only 10-15mm thick. 5. Speedier construction, more output by man hours. |
|  | Light weight Thermablock: Edge block Sizes: 400 x 200 x 200mm Weight of 4 Kg Edge Block - 87/- Coverage: 2.5 pcs per lenear metre |  | All above advantages for light weight blocks. This edge block can be used as beam with steel reinforcement. <ol style="list-style-type: none"> 1. Great saving on structural loading. 2. Light weight, easy to handle (less handling costs) less manpower for loading and off-loading. 3. Great saving on structural loading. 4. Speedier construction, more output by man hours. |
|  | Paving Blocks Pavers Used for Roads, Driveways and footpaths. Sizes: Light Duty 680/- Medium Duty 800/- Heavy Duty 1095/- Weight: Light Duty 2.5 to 3Kg Medium Duty 3 to 3.5Kg Heavy Duty 4 to 4.5Kg Coverage: Approximately Pieces Per square Metre Depending on the shape. |  | <ol style="list-style-type: none"> 1. High Abrasion Resistance 2. Aesthetic Design 3. Durable 4. Long Life 5. Maintenance Free 6. Easy Repair & Replacement 7. Easy Subservice Maintenance Compressive Strengths: Light Duty - 25N/Mm2 (loading upto 8 Tonnes) Medium Duty - 35N/Mm 2 (loading upto Tonnes) Heavy Duty - 49N/Mm2 (loading upto Tonnes) Available in Different Colours |

* PRICES INDICATED ARE SUBJECT TO CHANGE, PLEASE CONFIRM BEFORE ORDERING. PRICES INDICATED ARE INCLUSIVE OF VAT

| PRODUCT IMAGE | PRODUCT NAME | APPLICATION AREA | BENEFITS |
|---|---|--|--|
|  | Circle Stone: Ex S S & F 1300 1550/- 1850/- Cobble Stone Ex S S & F 1220/- 1400/- 1650/- |  | 1. High Abrasion Resistance 2. Aesthetic Design 3. Durable 4. Long Life 5. Maintenance Free 6. Easy Repair & Replacement 7. Easy Sub-service Maintenance" |
|  | Kenbro colour pavers: Used for Residential parkings and Driveways Sizes: 600 x 250x 50mm - 1200/- per SQM Weight: 5 Kg 33 Blocks per Square metre |  | High Abrasion Resistance Aesthetic Design Durable Long Life Maintenance Free Easy Repair & Replacement Easy Subservice Maintenance Strengths: Light Duty- 25N/Mm2-25N/mm2 Available in Different Colours |
|  | Kenbro Paving Slabs: Pavings slaps used as walkways in gardens on in footpaths Sizes: 600 x 600x 50mm - 350/- per Piece Weight: : 45 kg Coverage: slab covers are of 600 x 600mm High Abrasion Resistance |  | Aesthetic Design Durable Long Life Maintenance Free Easy Repair & Replacement Easy Subservice Maintenance Available in Different Colours |
|  | Kenbro Road Kerbs: Used for Road side Boundaries Sizes: 900 x 250x 125mm 500/- per Piece Ex works. Weight: : 65Kg Coverage: 0.900 linear metre per piece |  | Kerbs also have an importance of ensuring that rain water flows to a drain where it can be safely moved away from public areas. There would be many more puddles if it wasn't for Kerbs. |
|  | Kenbro Road Channels: Used for Road side Boundaries Sizes: 900 x 100 x 125mm 300/- per Piece Ex works Weight: : 40Kg Coverage: 0.900 linear metre per piece |  | Concrete channels are important to keep the paving blocks intact, as it acts as a support for the paving blocks for a firmer fix and avoid movement. |
|  | IBD or U Channel: Precast U channel for drain water Size: 600 x 450x 230mm 603/- per Piece Ex works Coverage: 600mm per piece. |  | The IBD is used for storm water drainage and if the best option due to the shape helps you to clean it instead of concrete pipes or plastic pipes, which are prone to blockages. |













*** PRICES INDICATED ARE SUBJECT TO CHANGE, PLEASE CONFIRM BEFORE ORDERING. PRICES INDICATED ARE INCLUSIVE OF VAT**

| PRODUCT IMAGE | PRODUCT NAME | APPLICATION AREA | BENEFITS |
|---|--|--|--|
|  | Shallow Drain: Drain for shallow water drainage Size: 600 x 490x 120mm - 800/- per Piece 460x 390x 100mm - 600/- per Piece Coverage: 600mm per piece. |  | The shallow drain is used for storm water drainage for shallow water drainage where vehicles can pass over it and is used on the road itself or going across the road. |
|  | Kenbro Interlocking Tiles: Used in flat roofs after laying Kenseal or App membranes Sizes: 250x250x 18mm 41/- per Piece Weight: : 2.5kg Coverage: 16 Pcs per square metre |  | Concrete Interlocking tiles are mainly used for human traffic and also to protect the waterproofing layer underneath the tiles. Very famously used on where there are terraces. |
|  | Kencoat Exterior and Interior wall Coating Styles - rough and smooth textures Colour - Any color can be achieved Coverage: 2 to 3 Kg per square metre depending on the thickness of the kencoat Rough - 175/- per Kg -175/- Smooth - 200/- per Kg-200/- |  | Applied in one single coat, the coating is homogeniously coloured therefore the colour will not fade. Hides a lot of uneven surfaces and gives a maintenance free surface. It sticks to virtually any surface e.g- Concrete, Plaster, Stone, Bricks, Wood, Chip Board, Ply wood, Cardboard, MDF, Fibreglass, Metal, Steel, Polystrene etc. Application does not require any sort of priming or elaborate surface preparation nor does it require any curing after application. |
|  | Kenbro Polyflex Floor Tiles: PVC Tiles for decorative and high quality vinyl tiles Colour - Different colours -12 1.5mm Thick per Box -3770/- 4.5sqm per box of 50 pcs 2.0mm Thick per Box -3465/- 3.24sqm per box of 36pcs |  | Polyflex is an economical, general-purpose vinyl tile combining excellent performance with durability, ease of maintenance and endless design possibilities. Available in bright colours in traditional or duotone marbling decoration. |
|  | Kenbro Kenflex Floor Tiles: PVC Tiles for decorative and high quality vinyl tiles Colour - 14 Different colours 1.2mm Thick - 1600/- per Box. Coverage: 4.05 square metres per box of 45pcs |  | Kenflex is an economical, general-purpose vinyl tile combining excellent performance with durability, ease of maintenance and endless design possibilities. Available in bright colours in traditional or duotone marbling decoration. |
|  | Kenbro XLPU Vinyl Sheet: Anti-static: PVC Sheetting for decorative and high quality vinyl sheeting Colour - 12 Different colours Coverage: 40 square metres Roll of 2 metres x 20 metres 69,600/- per Roll |  | XL PU, with its extensive proven pedigree, combines high performance with optimum style and enables the transformation of any commercial environment through the selection of vivid colours. Specially formulated polyurethane surface treatment, XL PU is available in a duotone marbleised decoration. XL PU features a polyurethane surface treatment which provides an excellent foundation for an easy, ongoing maintenance regime. |





*** PRICES INDICATED ARE SUBJECT TO CHANGE, PLEASE CONFIRM BEFORE ORDERING. PRICES INDICATED ARE INCLUSIVE OF VAT**

| PRODUCT IMAGE | PRODUCT NAME | APPLICATION AREA | BENEFITS |
|--|--|--|---|
|  | KenRubber: Cushion effect tiles made from foamed rubber Sizes: 600 x 600 x 12mm - 800/- per Piece Colors: Black, Grey, Red and Green |  | <p>A Cushion effect tiles made from foamed rubber, for comfort whilst walking, playing or exercising on them. The tiles do not need to be stuck down with adhesive, as they interlock and are held in place firmly.</p> <p>Ideal for:</p> <ol style="list-style-type: none"> 1. Nursery Schools 2. Gymnasium 3. Indoor and Outdoor play area 4. Sport grounds |
|  | Capping Strip: Used for finishing off upper edge of skirting. Size: 20mm width x 20 meters long 5800/- per Roll |  | <ol style="list-style-type: none"> 1. Tucks the floor finish to the wall. 2. Hides the edges of the PVC flooring. 3. Easy to clean and no sharp edge to collect dust. 4. Gives a neat finish to the installation and ensures a continuous, sealed surface. |
|  | Door Strip: Used for finishing off the edge of PVC tiles or sheeting Size: 25mm width x 30meters long 5220/- per Roll |  | <ol style="list-style-type: none"> 1. They protect the floor material edge and reduce the risk of the junction becoming a trip hazard 2. Take the edge of an installed floor covering down to the base flooring. 3. Door strips are protective edge trims which help to create a safe transition at floorcovering edges. 4. It is easily installed, and because they are flexible they can be curved on site. |
|  | Step Nosing: Used on the edge of the steps (thread side) Size: 50mm x 25mm x 2 meters long 1160/- per Piece |  | <ol style="list-style-type: none"> 1. Used on the edge of the stairs to minimise trip hazard. Cover existing steps for added safety 2. They take the impact of the wear and tear and prolong the lifespan of your stairs, Minimizing the scuffs, scratches and stains that ruin the surface. 3. Replacing these tread covers is much less costly than rebuilding a set of stairs, hence minimizing your maintenance costs. |
|  | Skirting: Black PVC Skirting fixed on the junction of the wall and floor. Size: 100 mm width x 2 meters long 540/- per Piece |  | <ol style="list-style-type: none"> 1. Installed up to 50% faster than traditional timber alternatives. 2. easy to clean and require almost no maintenance, unlike traditional wood skirting. 3. long lasting material that can provide a high quality finish. 4. Hide gaps between walls and floors, creating coves to avoid water sipping into the gaps. 5. Can be used in both dry and wet areas |
|  | Coving strip Used for forming a cove between the wall and the floor. Size: 20mm width x 2 meters long 940/- per Piece |  | <ol style="list-style-type: none"> 1. Creates a coved skirting, PVC sheeting is extended up the wall, which creates a water tight base. 2. coved up walls to produce hygienic and continuous floors. 3. It's often used in commercial buildings, hospitals and schools, especially in areas where hygiene is important or a watertight seal is necessary. |







*** PRICES INDICATED ARE SUBJECT TO CHANGE, PLEASE CONFIRM BEFORE ORDERING. PRICES INDICATED ARE INCLUSIVE OF VAT**

| PRODUCT IMAGE | PRODUCT NAME | APPLICATION AREA | BENEFITS |
|--|---|--|--|
|  | Kenbro PVC Water Bars: A pvc based pvc waterstop for waterproofing Sizes: RG Flat - 150mm - 640/- per Meter - 200mm - 700/- per Meter - 250mm - 1155/- per Meter RGF Centre Bulb - 150mm - 835/- per Meter - 200mm - 1000/- per Meter - 250mm - 1200/- per Meter Packing: 25 linear metre rolls |  | Water bar when embedded in the concrete joints, acts as a continuous watertight diaphragm to prevent any seepage of liquids in constructions joints which are subject to hydrostatic pressure. It is designed for expansion or contraction joint, meanwhile, it can accommodate lateral and transverse movements which make it capable to suit the moving joints. |
|  | Kenbro Polytape: Multipurpose repair tape Packaging: 150mm x 10 metre roll 1496/- per Roll Coverage: Approximately 10 linear metre |  | Polytape is a multipurpose repair tape used mostly for leaking roofs. It is a bitumen based self-adhesive tape with an aluminium foil finish to reflect the heat and light. It is smooth so it does not accumulate dirt. It can stick to almost any surface like concrete, metal, plastic, wood, glass e.t.c. |
|  | Keflex APP membrane: App rolls are a polymer Modified bitumen waterproofing membrane of the highest quality Packaging: 1M x 10M x 4mm Roll - Plain 4300/- 1M x 10M x 4mm Roll - grey Mineral 3500/- 1M x 10M x 3mm Roll - plain 2800/- Coverage: 9 Sqm Per Roll with overlaps |  | App can be applied in: <ol style="list-style-type: none"> 1. Single or Double layer roofing systems for normal use 2. Waterproofing wet areas like Toilets and inside a building where there are leakages. 3. Gutters and Drains 4. Sub-grade structures. |
|  | Kenbro DPC membrane: Damp proof corse Packaging: 1M x 7M x 3mm Roll - Sanded 2152/- per Roll Coverage: 7 Sqm Per Roll. |  | Used in: Foundation floors, RC walls, and boundary walls for waterproofing. |
|  | Kenbro Blow Torch: Torch used to heat APP rolls Packaging: 1 pcs in one packet - 14,500/- |  | A gas torch is a vital tool in laying a proper App roof. Properly applied, the torch allows the roof to be completely sealed, making for a cost effective and durable roof. It's a skilled process, and involves playing with a lot of heat. We strongly recommend hiring a professional rather than doing this yourself – if you make a mistake the risk of hurting yourself or severely damaging your property are extremely high. |
|  | Kenbro Marglass roll: Fibre netting used for waterproofing when applying colas and kenseal Packaging: 1Meter x 100 Meter roll - 13,990/- per Roll Coverage: Covers up to 100sq.metre per roll |  | Marglass Mesh is essential to reinforcing the External Insulating Finish System. It can provide the system with enough capacity to contain the movements, caused by thermal excursions or shrinkage, or the insulating material over time, preventing the formation of hairline cracks on the facade. |

*** PRICES INDICATED ARE SUBJECT TO CHANGE, PLEASE CONFIRM BEFORE ORDERING. PRICES INDICATED ARE INCLUSIVE OF VAT**

| PRODUCT IMAGE | PRODUCT NAME | APPLICATION AREA | BENEFITS |
|--|---|--|---|
|  | Kenbro Roofing tiles: Metal coated roofing sheets Size: 1335mm m x 420mm - 650/- per Piece Coverage: Covers approximately 2.1 tiles/metre ² Colours Available: Chest Nut - Oriental Red Forest Green - Estate Grey |  | Advantages of using roofing tiles <ol style="list-style-type: none"> 1. Light weight 2. Thermal and Sound proof 3. Wind Resistance 4. Low life cycle cost 5. Fire Resistance 6. Attractive Appearance 7. 30 Years Warranty 8. Maintenance Free |
|  | Kenbro Roofing Shingles: Bitument asphalt shingles Size: 333mm x 1000mm Coverage: 1 sq meter = 7pcs - 1300/- Per Box 3 sq meter = 28pcs - 3898/- Colours Available: - Royal Red -Jasper - Dark Grey |  | Advantages of using roofing shingles: <ol style="list-style-type: none"> 1. Light weight 2. Attractive Appearance 3. Waterproof 4. Easy to install 5. Long Lasting 6. Maintenance Free |
|  | Kenbro Bitumen 115/15 oxidized bitumen Packaging: 25Kg - 4350/- per Piece Used as: It is used for a lot of manufacturing processes making roofing felts, primers and also used in making roads. |  | Oxidized asphalt 115/ are shipped cold in Bag and heating to become hot until used in the manufacturing process. Most blown bitumen 115/ used to produce "mopping-grade" roofing asphalts. These bitumen 115/ are generally shipped as a solid and heated in a kettle at the work site. |
|  | Bitumastic: Expansion joint sealant for roofs Packaging: 20 Kg - 9500/ Coverage: Depending on the width and depth of expansion joint. |  | <ol style="list-style-type: none"> 1. Applied as a sealant in the expansion joint to avoid water penetrating through the joint 2. Flexible compound which allows the sealant to stretch and expand according to the buildings movement. 3. Dries to a soft rubber like material but not sticky. |
|  | Kenflex Sealant PU Expansion joint sealant Packaging: 600 cc - 800/ Coverage: Depending on the width and depth of expansion joint. Priming is essential. |  | <ol style="list-style-type: none"> 1. Applied as a sealant in the expansion joint to avoid water penetrating through the joint 2. Flexible compound which allows the sealant to stretch and expand according to the buildings movement. 3. Dries to a soft rubber like material but not sticky. 4. For internal interior application. |
|  | Extruder Gun Gun for Kenflex sealant Packaging: 1 - Gun. 1 - Plastic nozzle. Cartridge Size: 600cc = 3800/- |  | <ol style="list-style-type: none"> 1. Used to hold the Kenflex sealant PU cartridge for easier application. 2. Plastic Nozzel is included in the package for a neat and even application. 3. A 600cc cartridge is to be used in the gun. |

*** PRICES INDICATED ARE SUBJECT TO CHANGE, PLEASE CONFIRM BEFORE ORDERING. PRICES INDICATED ARE INCLUSIVE OF VAT**

| PRODUCT IMAGE | PRODUCT NAME | APPLICATION AREA | BENEFITS |
|---|--|---|---|
|  | Backer rod: Expansion joint sealant backing Size: 15mm - Linear meter - 60/- 20mm - Linear meter - 85/- 25mm - Linear meter -110/- |  | <ol style="list-style-type: none"> 1. Used to fill cracks and gaps between building materials. 2. The rod is used to ensure that the depth to be filled the sealant is half the width of gap to be filled 3. The rods have bond breaking properties hence do not bond with the sealant. 4. the sealant only bonds with the building material hence preventing triple bonding. |
|  | Expanded Insulation Board: Expanded polystyrene insulating board Size: 120cm x 60cm x 5cm - 750/- per Piece |  | <ol style="list-style-type: none"> 1. Thermal board for heat proofing on flat roofs. 2. For cold storage rooms, insulation in walls and floor 3. Hot water piping insulation. 4. It is practically impervious to water. |
|  | Hyperseal Hydrophilic waterstop creates an effective compression joint when in contact with water, it swells up to 300% to create a compressed seal. Size: 15meters roll 410/- per linear meter 1. Active protection when in contact with |  | <ol style="list-style-type: none"> water. 2. Simple application - can be nailed or suitable adhesive. 3. Slow expansion to prevent damage on concrete 4. Retains original shape after repeated contraction. 5. Swelling properties does not affect the strip in the long run. 6. Sustains effective seal in wet conditions. |
| | | | |
| | | | |
| | | | |

* PRICES INDICATED ARE SUBJECT TO CHANGE, PLEASE CONFIRM BEFORE ORDERING. PRICES INDICATED ARE INCLUSIVE OF VAT

Official suppliers of BASF & COLAS products in Kenya.



PVC SHEETING



EPOXY



ADHESIVES



APP



PAVING BLOCKS




UCRETE



COBBLE STONE



KENCOAT

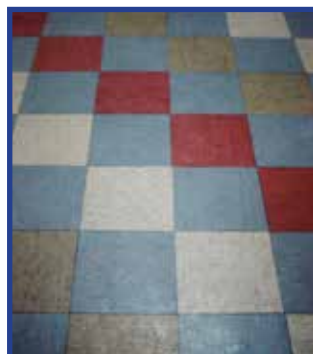

PVC TILES



KENSEAL



TILE ADHESIVE



MANHOLE

* PRICES INDICATED ARE SUBJECT TO CHANGE, PLEASE CONFIRM BEFORE ORDERING. PRICES INDICATED ARE INCLUSIVE OF VAT

BASF Products

MASTERBRACE ADH 2200
 MASTEREMACO S 488 (Formerly EMACO S88CT)
 EPOXY ROLLER
 FLOW CABLE 50
 GLENIUM 114
 MASTERSEAL P.G. 470 (Formerly Masterflex 700 P.G)
 MASTERSEAL G.G 470 (Formerly Masterflex 700 G.G)
 MASTERSEAL P 101 (Formerly MASTERFLEX PRIMER)
 MASTERFLOW 928
 MASTERKURE 106
 MASTERPROTECT 180 (Formerly Masterseal 180)
 MASTERSEAL 300H WHITE
 MASTERTOP 1110 T
 MASTERTOP 1120 T
 MASTERTOP 1200 PLUS RES (PRIMER)
 MASTERTOP 1210 CP
 MASTERTOP 1230 Set
 MASTERTOP 1240 Set
 MASTERTOP PRIMER 2
 POZZOLITH STANDARD
 RHEOBUILD 1100
 RHEOBUILD 2000M
 RHEOBUILD 850
 RHEOBUILD LD80
 MASTERCASE 141 (Formerly RHEOMIX 141)

THORO WATER PLUG
 UCRETE LIQUID PIGMENT GREY
 UCRETE LIQUID PIGMENT CREAM
 UCRETE MF
 UCRETE PRIMER RG
 UCRETE PRIMER SC
 UCRETE RG LE
 UCRETE UD200
 BACKER ROAD 15MM
 BACKER ROAD 20MM
 BACKER ROAD 25MM
 BITUMEN BOARDS-15MM
 BITUMEN BOARDS-19MM
 BITUMEN BOARDS-25MM
 BARREL GUN
 COLOUR PACK DUSTY GREY
 COLOUR PACK GREEN
 COLOUR PACK K-WHITE
 COLOUR PACK LIGHT GREY
 COLOUR PACK YELLOW
 MASTERINJECT 1315 (Formerly CONCRECIVE -1315)
 MASTERINJECT 1320 (Formerly CONCRECIVE -1320)
 MASTERINJECT (Formerly CONCRECIVE -1335)
 CONCRECIVE 1418
 CONCRECIVE 1450
 MASTERBRACE ADH 2200 (Formerly CONCRECIVE 2200)
 MASTEREMACO S 488 (Formerly EMACO S88CT)

Colas Products

| | | |
|---------------------|----------------------|----------------------------------|
| Colaskote Type 3 | Alubit | Distributors |
| Colastoke Type 5 | Decoseal | PF4 Primer |
| Colaskote Type 7 | Vapo seal | Insulation & wood block Adhesive |
| Colaskote Type 3 LB | Colmastic | Colascaulk |
| Colaskote Type 5 LB | Colas cutback RC 2 | |
| Colaskote Type 7 LB | Car underbody sealer | |

Distributors


WHERE TO FIND US

COME VISIT US.

Head Office - Wambugu road off Limuru road.



Factory - Mombasa road

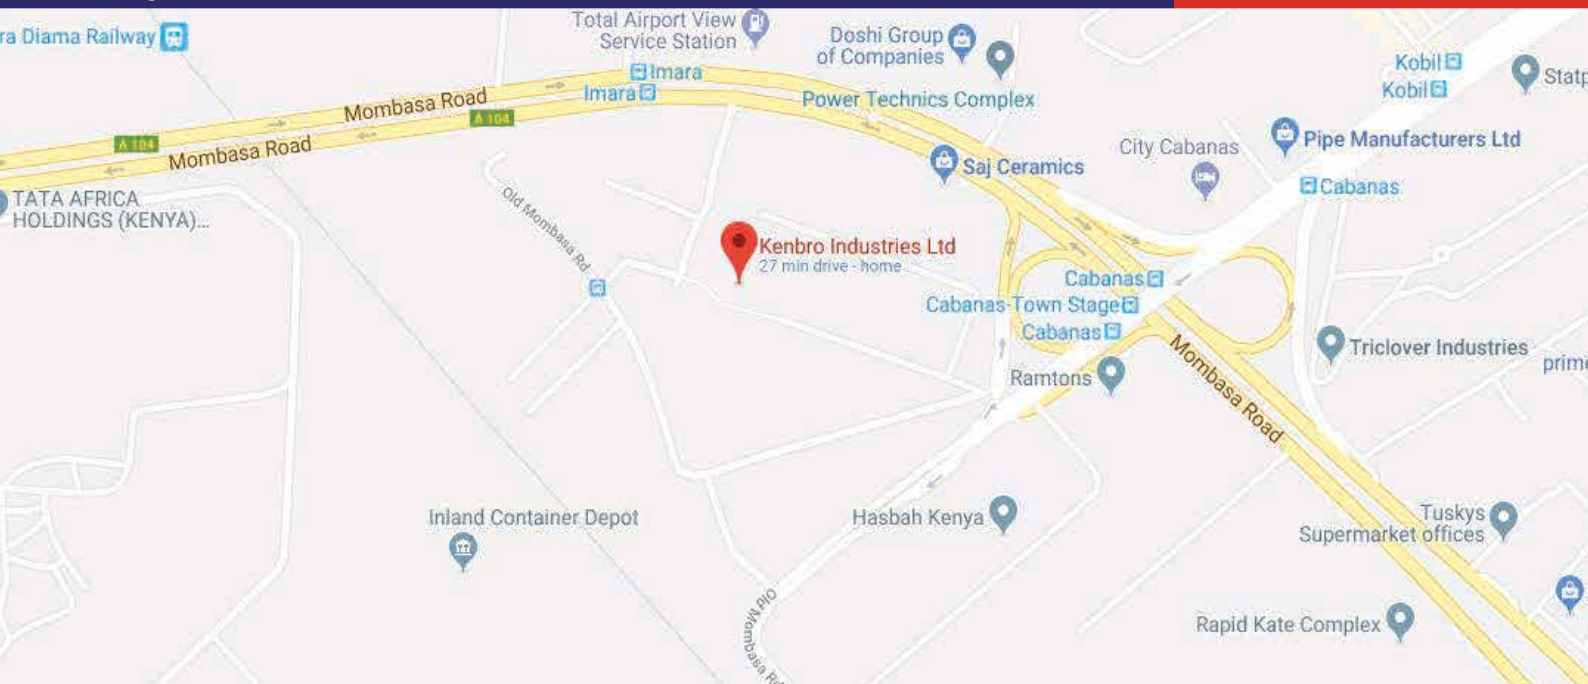

HEAD OFFICE

Corner of Wambugu Road and Limuru Road

Telephone:
(020) 242 2242/3
(020) 243 3383/5

Mobile:
0724 255 674, 0724 255 675
0733 633 119, 0735 633 199

info@kenbro.co.ke
www.kenbro.co.ke

Monday to Friday - 8:00 AM to 5:00 PM
Saturday - 8.00AM to 1.00PM

FACTORY

Off Mombasa Road

Telephone:
(020) 354 7945/6/7
(020) 353 5463

Mobile:
0722 848 585
0733 697 959, 0780 355 900

info@kenbro.co.ke
www.kenbro.co.ke

Monday to Friday - 8:00 AM to 5:00 PM
Saturday - 8.00AM to 1.00PM